


G-213



- Forged, Quenched & Tempered, with alloy pins.
- Working Load Limit permanently shown on every shackle.
- Hot-dip galvanized.
- Sizes 3/8 inch and below are mechanically galvanized.
- Fatigue rated to 20,000 cycles at 1-1/2 times the Working Load Limit.
- Shackles can be furnished proof tested with certificates to designated standards, such as ABS, DNV, Lloyds, or other certification. Charges for proof testing and certification available when requested at the time of order.
- Shackles are Quenched & Tempered and can meet DNV impact requirements of 42 Joules (31 ft-lb) at -20° C (-4° F).
- G-213 Round pin anchor shackles meet the performance requirements of Federal Specification RR-C-271H, Type IVA, Grade A, Class 1, except for those provisions required of the contractor.
- DO NOT SIDE LOAD ROUND PIN SHACKLES.
- Look for the Red Pin®... the mark of genuine Crosby quality.

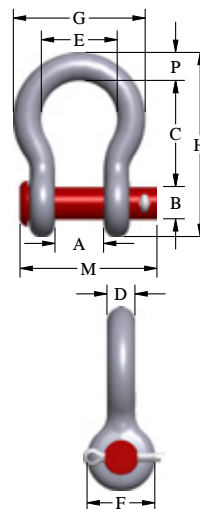

G-213 Round Pin Anchor Shackles

Nominal Size (in)	Working Load Limit (t)	Stock No.	Weight Each (lb)	Dimensions (in)												Replacement Pin Stock No.
				A	Tol. A ±	B	C	Tol. C ±	D	E	F	G	H	M	P	
1/4	1/2	1018017	.13	.47	.06	.32	1.13	.06	.06	.78	.62	1.28	1.84	1.34	.25	-
5/16	3/4	1018035	.18	.53	.06	.39	1.22	.06	.06	.84	.75	1.46	2.09	1.63	.31	-
3/8	1	1018053	.29	.66	.06	.45	1.44	.13	.06	1.03	.92	1.79	2.50	1.86	.38	-
7/16	1 1/2	1018071	.38	.75	.06	.51	1.69	.13	.06	1.16	1.06	2.04	2.91	2.13	.44	-
1/2	2	1018099	.71	.81	.06	.64	1.88	.13	.06	1.31	1.18	2.31	3.28	2.38	.50	-
5/8	3 1/4	1018115	1.50	1.06	.06	.78	2.38	.13	.06	1.69	1.50	2.93	4.19	2.91	.69	-
3/4	4 3/4	1018133	2.32	1.25	.06	.88	2.81	.25	.06	2.00	1.81	3.50	4.97	3.44	.81	-
7/8	6 1/2	1018151	3.49	1.44	.06	1.03	3.31	.25	.06	2.28	2.10	4.04	5.83	3.82	.97	-
1	8 1/2	1018179	5.00	1.69	.06	1.16	3.75	.25	.06	2.69	2.38	4.69	6.56	4.53	1.06	-
1-1/8	9 1/2	1018197	6.97	1.81	.06	1.28	4.25	.25	.06	2.91	2.68	5.15	7.47	5.13	1.25	1082232
1-1/4	12	1018213	9.75	2.03	.06	1.41	4.69	.25	.06	3.26	3.00	5.76	8.26	5.50	1.38	1082250
1-3/8	13 1/2	1018231	13.25	2.25	.13	1.53	5.25	.25	.13	3.62	3.31	6.38	9.16	6.13	1.50	1082278
1-1/2	17	1018259	17.25	2.38	.13	1.66	5.75	.25	.13	3.88	3.62	6.94	10.00	6.50	1.62	1082296
1-3/4	25	1018277	29.46	2.88	.13	2.03	7.00	.25	.13	5.00	4.19	8.80	12.34	7.75	2.25	1082312
2	35	1018295	45.75	3.25	.13	2.28	7.75	.25	.13	5.75	4.81	10.15	13.69	8.75	2.40	1082330

6:1 Design Factor. Maximum Proof Load is 2 times the Working Load Limit.

Load Rated

Fatigue Rated

QUIC-CHECK®

QT &

MAX TOUGH®

CE

APPLICATION AND WARNING INFORMATION
SECTION 17