


G-215



- Forged, Quenched & Tempered, with alloy pins.
- Working Load Limit permanently shown on every shackle.
- Hot-dip galvanized.
- Sizes 3/8 inch and below are mechanically galvanized.
- Fatigue rated to 20,000 cycles at 1-1/2 times the Working Load Limit.
- Shackles can be furnished proof tested with certificates to designated standards, such as ABS, DNV, Lloyds, or other certification. Charges for proof testing and certification available when requested at the time of order.
- Shackles are Quenched and Tempered and can meet DNV impact requirements of 42 Joules (31 ft-lb) at -20° C (-4° F).
- G-215 Round pin chain shackles meet the performance requirements of Federal Specification RR-C-271H, Type IVB, Grade A, Class 1, except for those provisions required of the contractor.
- DO NOT SIDE LOAD ROUND PIN SHACKLES.
- Look for the Red Pin®... the mark of genuine Crosby quality.

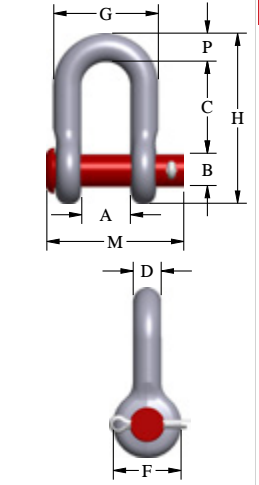

G-215 Round Pin Chain Shackles

Nominal Size (in)	Working Load Limit (t)	Stock No.	Weight Each (kg)	Dimensions (mm)											Replacement Pin Stock No.
				A	Tol. A ±	B	C	Tol. C ±	D	F	G	H	M	P	
1/4	1/2	1018810	.05	12	1.5	8	22	1.5	6	16	25	40	34	6	-
5/16	3/4	1018838	.08	14	1.5	10	26	1.5	8	19	29	48	41	8	-
3/8	1	1018856	.11	17	1.5	11	32	3.3	10	23	36	59	47	10	-
7/16	1 1/2	1018874	.18	19	1.5	13	37	3.3	11	27	41	68	54	11	-
1/2	2	1018892	.23	21	1.5	16	41	3.3	13	30	46	77	60	13	-
5/8	3 1/4	1018918	.55	27	1.5	20	51	3.3	16	38	59	96	74	16	-
3/4	4 3/4	1018936	.91	32	1.5	22	60	6.4	19	46	70	115	87	21	-
7/8	6 1/2	1018954	1.49	37	1.5	26	71	6.4	22	53	81	135	97	25	-
1	8 1/2	1018972	2.15	43	1.5	30	81	6.4	25	60	94	151	115	25	-
1-1/8	9 1/2	1018990	2.86	46	1.5	32	90	6.4	29	68	103	172	130	32	1082232
1-1/4	12	1019016	4.08	52	3.3	36	100	6.4	32	76	115	191	140	35	1082250
1-3/8	13 1/2	1019034	5.44	57	3.3	39	111	6.4	35	84	127	210	156	38	1082278
1-1/2	17	1019052	7.33	60	3.3	42	124	6.4	38	92	137	230	165	41	1082296
1-3/4	25	1019070	11.79	73	3.3	52	146	6.4	44	106	162	279	197	54	1082312
2	35	1019098	19.6	83	3.3	58	171	6.4	53	127	184	324	222	60	1082330

6:1 Design Factor. Maximum Proof Load is 2 times the Working Load Limit.

