


Wirelink Plus



- Available in capacities ranging from 2,200 lb to 660,000 lb.
- The non-indicating version of Crosby SP's popular Radiolink Plus and Loadlink Plus digital dynamometer tension loadcells.
- Multiple output options to include mV/V, analog out, ASCII, MODBUS RTU, and CAN-BUS.
- Constructed of lightweight, aerospace grade aluminum.
- Available with IP68 environmental protection.
- Supplied with a 10-meter cable as standard, however, usable cable length varies greatly with lengths available to 1,500 meters depending on output format.
- Options for subsea use available.
- 2-year warranty.
- DNV-GL Type Approval.
- Complies with ASME B30.26.
- Operating Temperature: 14°F to 122°F.
- Accuracy: $\pm 0.1\%$ of full scale.
- Protection: IP65 / NEMA4X.

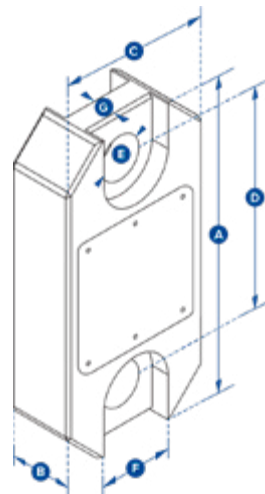

Straightpoint Wirelink Plus (WLP)

Stock No.	Model	Capacity (lb)	Resolution (lb)	Weight (lb)	Design Factor	Dimensions (in)							Crosby Shackle	
						A	B	C	D	ØE	F	G		
2789154	WLP1T	2,200	1	3.3	12:1	8.03	1.69	4.09	5.75	0.96	1.89	0.75	G2130	1019490
2789158	WLP2T5	5,500	2	3.3	7:1	8.03	1.69	4.09	5.75	0.96	1.89	0.75	G2130	1049490
2789273	WLP6T5	14,300	2	5.3	7:1	9.80	1.69	4.45	6.50	1.50	2.60	1.26	G2130	1019533
2789152	WLP12T	26,000	5	8.2	7:1	12.01	1.85	4.45	7.60	1.87	—	—	G2130	1019597
2789157	WLP25T	55,000	10	11	5:1	13.39	2.36	4.53	8.46	2.17	—	—	G2130	1019659
2789160	WLP35T	77,000	10	19	5:1	15.47	2.95	4.96	8.86	2.36	—	—	G2130	1019677
2789269	WLP55T	120,000	20	28.7	5:1	16.69	2.95	7.09	9.06	2.99	—	—	G2140	1021156
2789161	WLP75T	165,000	20	35.3	5:1	18.50	2.95	7.95	10.24	2.99	—	—	G2140	1021174
2789151	WLP100T	220,000	100	75	5:1	23.94	3.90	10.04	12.60	4.29	—	—	G2140	1021192
2789153	WLP150T	330,000	100	101.4	4:1	26.38	3.90	11.93	14.17	4.29	—	—	G2140	1021218
2789155	WLP200T	440,000	200	180.8	5:1	27.56	5.67	13.78	13.78	5.71	—	—	G2140	1021234
2789156	WLP250T	550,000	200	180.8	4:1	27.56	5.67	13.78	13.78	5.71	—	—	G2140	1021243
2789159	WLP300T	660,000	200	260	5:1	31.73	5.91	16.77	13.78	6.30	—	—	G2140	1021252

Part Number	Description
ICA1	3 wire 0-10v analogue output
ICA2	3 wire 0-5v analogue output
ICA3	4 wire +/- 10v analogue output
ICA4	3 wire 4-20mA analogue output
ICA5	2 wire 4-20mA analogue output