


Loadlink Plus



Optional connection to the Crosby SP Handheld Plus part no. HHP 2789459

- Capacity from 1t to 300t.
- Unmatched weight-to-strength ratio.
- 30% lighter than competing dynamometers with the same safety rating.
- Large high resolution 25mm LCD display.
- Features full function push button controls for tare, choice of units (lbs, kg, kN, and metric tons), peak hold, preset tare, audible set-point alarm, and an overload counter.
- The highest standard resolution of any digital dynamometer on the market today (5,000+ divisions).
- 100Hz peak hold.
- RS-485 serial output.
- 2-year warranty.
- DNV-GL Type Approval.
- Design validated by FEA.
- Complies with ASME B30.26.
- Battery Type: 9v PP3 Alkaline.
- Battery Life: 80 hours continuous.
- Operating Temperature: -10°C to +50°C.
- Accuracy: ±0.1% of full scale.
- Protection: IP65 / NEMA4X.

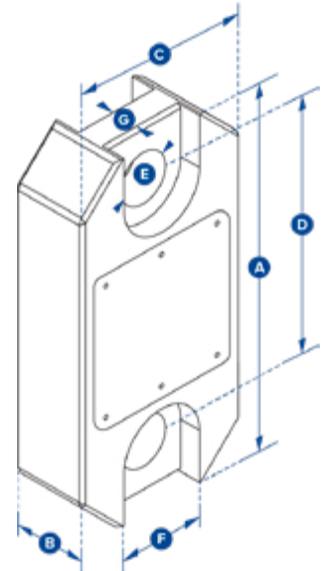

Straightpoint Loadlink Plus (LLP)

Stock No.	Model	Capacity (t)	Resolution (t)	Weight (kg)	Design Factor	Dimensions (mm)							Crosby Shackles	
						A	B	C	D	ØE	F	G		
2789042	LLP1T	1000 (kg)	0.5 (kg)	1.5	12:1	204	43	104	146	25	48	19	G2130	1019490
2789046	LLP2T5	2.5	0.001	1.5	7:1	204	43	104	146	25	48	19	G2130	1049490
2789050	LLP6T5	6.5	0.001	2.4	7:1	249	43	113	165	38	66	32	G2130	1019533
2789040	LLP12T	12	0.002	3.7	7:1	305	47	113	193	48	66	32	G2130	1019597
2789045	LLP25T	25	0.005	5	5:1	340	60	115	215	55	66	32	G2130	1019659
2789048	LLP35T	35	0.005	8.6	5:1	393	75	126	225	60	66	32	G2130	1019677
2789049	LLP55T	55	0.01	13	5:1	424	75	180	230	76	66	32	G2140	1021156
2789051	LLP75T	75	0.01	16	5:1	470	75	202	260	76	66	32	G2140	1021174
2789039	LLP100T	100	0.05	34	5:1	608	99	255	320	109	66	32	G2140	1021192
2789041	LLP150T	150	0.05	46	4:1	670	99	303	360	109	66	32	G2140	1021218
2789043	LLP200T	200	0.1	82	5:1	700	144	350	350	145	66	32	G2140	1021234
2789044	LLP250T	250	0.1	82	4:1	700	144	350	350	145	66	32	G2140	1021243
2789047	LLP300T	300	0.1	118	5:1	806	150	426	350	160	66	32	G2140	1021252