


AS-3 Jaw & Eye

AS-3 JAW & EYE				Dimensions (in)												Replacement Bolt Kit Stock No.
Working Load Limit (t)*	Wire Rope Size (in)	Stock No.	Weight Each (lb)	A	B	C	D	E	F	G	H	I	J	K	L	
.40	1/8	1016205	.3	.88	2.50	3.25	.25	.19	.25	.38	.41	.25	.25	.38	.84	2018360
.68	1/4	1016216	.9	1.31	3.69	4.56	.31	.22	.38	.44	.56	.31	.38	.44	.88	2018361
1.35	3/8	1016224	1.9	1.63	4.19	5.44	.50	.28	.50	.69	.78	.50	.66	.63	1.38	2018362
2.70	1/2	1016232	4.6	2.00	6.19	8.13	.75	.38	.75	.94	1.19	.75	.91	1.00	2.00	2018363
4.50	5/8	1016243	9.1	2.50	7.88	10.19	1.00	.53	.88	1.13	1.50	1.00	1.25	1.19	2.63	2018364
7.65	3/4	1016250	15.6	3.00	9.50	12.25	1.56	.56	1.25	1.34	2.09	1.25	1.41	1.50	3.13	2018365
9.00	7/8	1016259	39.0	4.00	13.75	17.31	1.75	.81	1.50	1.75	3.50	1.72	1.63	1.81	4.69	2018367
13.5	1	1016268	40.0	4.00	13.44	17.31	1.75	.81	1.50	1.75	3.50	2.00	2.00	2.13	4.69	2018367
22.5	1-1/4	1016277	78.0	5.00	16.00	20.75	2.00	1.13	2.00	2.38	3.69	2.25	2.31	2.38	5.25	2018368
31.5	1-1/2	1016286	78.0	5.00	16.00	20.75	2.00	1.13	2.00	2.38	3.69	2.25	2.31	2.38	5.2	2018368

5:1 Design Factor. Individually Proof Tested to 2 times the Working Load Limit.

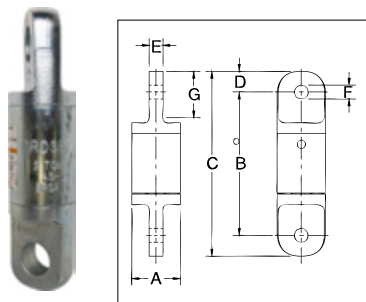

AS-5 Eye & Eye

AS-5 EYE & EYE				Dimensions (in)						
Working Load Limit (t)*	Wire Rope Size (in)	Stock No.	Weight Each (lb)	A	B	C	D	E	F	G
.40	1/8	1016409	.3	.88	2.63	3.38	.38	.25	.25	.81
.68	1/4	1016418	.9	1.31	3.75	4.63	.44	.31	.38	.88
1.35	3/8	1016427	1.8	1.63	4.31	5.56	.63	.50	.66	1.34
2.70	1/2	1016436	4.3	2.00	6.13	8.13	1.00	.75	.91	2.00
4.50	5/8	1016445	8.6	2.50	7.75	10.63	1.19	1.00	1.25	2.63
7.65	3/4	1016454	15.4	3.00	9.31	12.31	1.50	1.25	1.41	3.13
9.00	7/8	1016463	37.0	4.00	13.88	17.50	1.81	1.72	1.63	4.69
13.5	1	1016472	39.0	4.00	13.25	17.50	2.13	2.00	2.13	4.69
22.5	1-1/4	1016481	72.0	5.00	16.00	20.75	2.38	2.25	2.31	5.25
31.5	1-1/2	1016490	72.0	5.00	16.00	20.75	2.38	2.25	2.31	5.25

5:1 Design Factor. Individually Proof Tested to 2 times the Working Load Limit.