




AS-7 Bullet Style
Jaw & Jaw

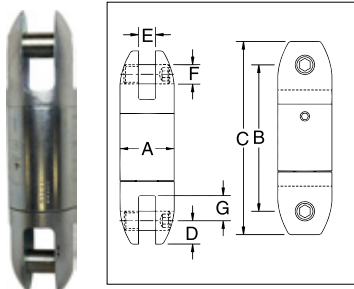

AS-11 Thimble & Jaw



AS-14 Thimble & Bullet



AS-7 Bullet Style Jaw & Jaw

AS-7 BULLET STYLE JAW & JAW				Dimensions (in)							Replacement Bolt Kit Stock No.
Working Load Limit (t)*	Wire Rope Size (in)	Stock No.	Weight Each (lb)	A	B	C	D	E	F	G	
.40	1/8	1016604	.4	.88	2.38	3.13	.38	.25	.31	.40	2003936
.68	1/4	1016611	1.1	1.31	3.56	4.44	.44	.31	.38	.56	2003904
1.35	3/8	1016622	1.8	1.63	4.06	5.19	.56	.50	.44	.81	2003905
2.70	1/2	1016631	3.8	2.00	5.44	7.06	.81	.75	.63	.94	2003906
4.50	5/8	1016640	8.0	2.50	7.75	10.06	1.13	1.00	.88	1.56	2003907
7.65	3/4	1016649	14.5	3.00	9.88	12.38	1.25	1.31	1.00	2.13	2003943
9.00	7/8	1016652	40.0	4.00	13.13	16.75	1.75	1.75	1.50	3.25	2003959
13.5	1	1016658	40.0	4.00	13.13	16.75	1.75	1.75	1.50	3.25	2003959
22.5	1-1/4	1016662	84.0	5.00	15.94	20.75	2.38	2.00	2.00	3.69	2003935
31.5	1-1/2	1016667	84.0	5.00	15.94	20.75	2.38	2.00	2.00	3.69	2003935

5:1 Design Factor. Individually Proof Tested to 2 times the Working Load Limit.

AS-11 Thimble & Jaw

AS-11 THIMBLE & JAW				Dimensions (in)							Replacement Bolt Kit Stock No.
Working Load Limit (t)*	Wire Rope Size (in)	Stock No.	Weight Each (lb)	A	B	C	D	E	F	G	
7.65	3/4	1017020	18.0	3.00	8.66	13.00	1.34	1.56	1.19	2.09	2018365
13.5	1	1017029	42.0	4.00	11.66	17.53	1.75	1.78	1.50	3.50	2018367

5:1 Design Factor. Individually Proof Tested to 2 times the Working Load Limit.

AS-14 Thimble & Bullet

AS-14 THIMBLE & BULLET				Dimensions (in)							Replacement Bolt Kit Stock No.
Working Load Limit (t)*	Wire Rope Size (in)	Stock No.	Weight Each (lb)	A	B	C	D	E	F	G	
7.7	3/4	1017255	20.0	3.00	9.00	13.25	1.25	1.31	1.00	2.13	2003943
13.6	1	1017258	40.0	4.00	11.50	17.38	1.75	1.75	1.50	3.25	2003959

5:1 Design Factor. Individually Proof Tested to 2 times the Working Load Limit.