


Swivel Safety Hook BKL

Safety hook with swivel for improved positioning of the hook before the load is lifted (360° rotation).

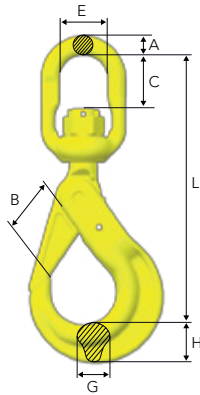


Stock No.	Code	WLL (lb)	Dimensions (in)							Weight (lb)
			L	B	C	E	A	G	H	
Z101114	BKL-6-10	3,306	5.87	1.14	.91	1.30	.43	.59	.83	1.54
Z101104	BKL-7/8-10	5,700	7.20	1.46	1.06	1.50	.47	.67	1.02	2.65
Z101028	BKL-10-10	8,800	8.58	1.77	1.46	1.73	.59	.83	1.22	4.41
Z101036	BKL-13-10	15,000	11.10	2.17	1.93	1.89	.75	1.18	1.57	8.82
Z101044	BKL-16-10	22,600	13.43	2.44	2.56	2.40	.98	1.46	1.97	15.87
Z101093	BKL-18/20-10	35,300	14.49	2.68	2.76	2.83	1.22	1.73	2.44	25.13

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M.

4:1 Design Factor

Swivel Safety Hook BKLK

Safety hook with ball-bearing for 360° rotation under full WLL

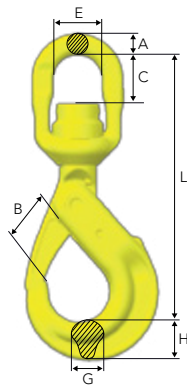

Stock No.	Code	WLL (lb)	Dimensions (in)							Weight (lb)
			L	B	C	E	A	G	H	
Z101116	BKLK-6-10	3,306	5.87	1.14	.94	1.30	.43	.59	.83	1.54
Z101106	BKLK-7/8-10	5,700	7.20	1.46	1.06	1.50	.47	.67	1.02	2.65
Z101030	BKLK-10-10	8,800	8.58	1.77	1.38	1.73	.59	.83	1.22	4.41
Z101038	BKLK-13-10	15,000	11.02	2.17	1.77	1.89	.75	1.18	1.57	8.82
Z101046	BKLK-16-10	22,600	13.35	2.44	2.44	2.40	.98	1.46	1.97	16.09
Z101095	BKLK-18/20-10	35,300	14.49	2.68	2.36	2.83	1.22	1.73	2.44	25.35
Z101294	BKLK-22-10 OS	44,080	17.17	3.11	3.15	3.15	1.38	1.97	2.44	37.04
Z101295	BKLK-26-10 OS	60,169	19.13	3.94	4.33	4.02	1.77	2.13	2.68	57.32


Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M.

For larger sizes, see Classic Grade 8.

4:1 Design Factor

Swivel Safety Hook with Griplatch LBK

Safety hook with griplatch and swivel for improved positioning of the hook before the load is lifted (360° rotation).

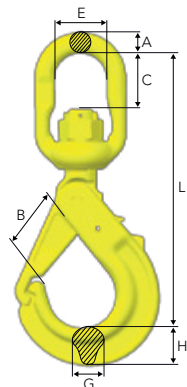


Stock No.	Code	WLL (lb)	Dimensions (in)							Weight (lb)
			L	B	C	E	A	G	H	
Z100978	LBK-7/8-10	5,700	6.97	1.46	1.06	1.50	.47	.79	.87	2.43
Z100960	LBK-10-10	8,800	8.43	1.85	1.46	1.73	.59	.87	1.14	3.97
Z100993	LBK-13-10	15,000	10.31	2.09	1.77	1.89	.75	1.14	1.50	7.72
Z100995	LBK-16-10	22,600	12.76	2.68	2.60	2.40	.98	1.18	1.77	13.01

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M.

4:1 Design Factor

Swivel Safety Hook with Griplatch LKBK

Safety hook with griplatch and ball-bearing for 360° rotation under full WLL

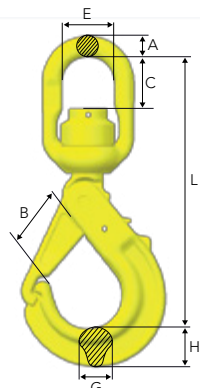

Stock No.	Code	WLL (lb)	Dimensions (in)							Weight (lb)
			L	B	C	E	A	G	H	
Z100980	LKBK-7/8-10	5700	6.93	1.46	1.06	1.50	.47	.79	.87	2.43
Z100962	LKBK-10-10	8800	8.39	1.85	1.38	1.73	.59	.87	1.14	4.19
Z100997	LKBK-13-10	15000	10.28	2.09	1.69	1.89	.75	1.14	1.50	7.94
Z100999	LKBK-16-10	22600	12.72	2.68	2.40	2.40	.98	1.18	1.77	13.67

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M.

4:1 Design Factor