


Sling Hook EK


Sling hook with eye connector.

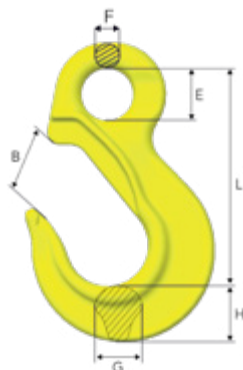

Stock No.	Code	WLL (lb)	Dimensions (in)						Weight (lb)
			L	B	E	F	G	H	
Z101162	EK- 6-10	3,306	3.66	1.14	.91	.39	.67	.79	.88
Z101164	EK- 7/8-10	5,700	4.25	1.26	1.10	.47	.67	.91	1.10
Z101166	EK-10-10	8,800	5.28	1.61	1.34	.55	.91	1.18	1.98
Z101168	EK-13-10	15,000	6.54	1.93	1.73	.71	1.10	1.50	4.41
Z101170	EK-16-10	22,600	7.99	2.40	2.20	.87	1.42	1.85	7.28
Z101306	EK-20-10	35,300	9.02	2.80	2.40	1.02	1.65	2.36	13.67
Z101307	EK-22-10	44,080	10.51	3.23	2.52	1.22	1.69	2.64	18.74
Z101308	EK-26-10	60,169	11.85	3.74	2.60	1.26	2.01	2.95	26.68
Z101309	EK-32-10	88,160	13.90	4.13	3.54	1.50	2.40	3.86	54.23

4:1 Design Factor. Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M-02.

Sling Hook EKN (with latch)

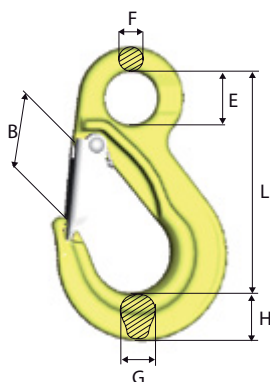


Stock No.	Code	WLL (lb)	Dimensions (in)						Weight (lb)
			L	B	E	F	G	H	
Z101128	EKN- 6-10	3,306	3.66	.98	.91	.39	.67	.79	.88
Z101130	EKN- 7/8-10	5,700	4.25	1.02	1.10	.47	.67	.91	1.32
Z101132	EKN-10-10	8,800	5.28	1.38	1.34	.55	.91	1.18	2.20
Z101134	EKN-13-10	15,000	6.54	1.65	1.73	.71	1.10	1.50	4.63
Z101136	EKN-16-10	22,600	7.99	2.09	2.20	.87	1.42	1.85	8.82
Z101327	EKN-20-10	35,300	9.02	2.56	2.40	1.02	1.65	2.36	14.11
Z101328	EKN-22-10	44,080	10.51	2.87	2.52	1.22	1.69	2.64	19.62
Z101329	EKN-26-10	60,169	11.85	3.23	2.60	1.26	2.01	2.95	28.66
Z101330	EKN-32-10	88,160	13.90	3.78	3.54	1.50	2.40	3.86	55.12

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M.

4:1 Design Factor

Container Hook CH

Made for lifting containers in their lower fittings.



Stock No.	Code	WLL (lb)	Dimensions (in)						Weight (lb)
			A	L	E	B	H	G	
Z101220	CH-3	27,550	.98	7.36	2.76	1.81	1.85	2.95	8.378
Z101221	CH-3. 45° left	27,550	.98	7.36	2.76	1.81	1.85	2.95	8.378
Z101219	CH-3. 45° right	27,550	.98	7.36	2.76	1.81	1.85	2.95	8.378

4:1 Design Factor

Alt. 1 - Straight lift

Alt. 2 - Angular lift

