

Swivel Safety Hook BKLK Offshore HDG

Stock No.	Code	WLL (lb) 4:1	WLL (lb) 5:1	Dimensions (in)							Weight (lb)
				L	B	C	E	A	G	H	
ZG101370	BKLK-13-8 OS W HDG	14,800	12,000	12.09	2.17	2.83	2.40	0.98	1.18	1.57	10.80
ZG101371	BKLK-16-8 OS W HDG	22,600	18,000	14.45	2.44	3.46	3.23	1.02	1.46	1.97	18.52
ZG1013561	BKLK-18/20-8 OS W HDG	35,300	28,300	15.55	2.68	3.46	3.15	1.38	1.81	2.52	29.76
ZG101294	BKLK-22-8 OS HDG	44,080	35,300	17.17	3.11	3.15	3.15	1.38	1.97	2.44	37.04
ZG101295	BKLK-26-8 OS HDG	60,169	47,700	19.13	3.94	4.33	4.02	1.77	2.13	2.68	58.42
ZG101344	BKLK-32-8 OS HDG	72300	57,745	20.98	4.72	4.33	4.02	1.77	2.44	3.39	71.21

Manufactured according to requirements in: DNV 2.7-1:2013, DNVGL-ST-0377:2016, DNVGL-ST-0388:2016 and NORSOK R-002:2017.

Safety Hook BKLKD Offshore with Double Latch HDG

With recessed trigger

Due to the motion of the sea when loading and unloading offshore, direct impact on the hook could cause the latch to unintentionally open when not being under load, risking the load to unhitch. The double latch safety hook has an extra latch retaining the load in this case.

Stock No.	Code	WLL (lb) 4:1	WLL (lb) 5:1	Dimensions (in)							Weight (lb)
				L	B	C	E	A	G	H	
ZGS1167	BKLKD-13-8 OS W HDG	14,800	12,000	12.09	1.73	2.83	2.40	.98	1.18	1.57	11.02
ZGS1168	BKLKD-16-8 OS W HDG	22,600	18,000	14.45	1.89	3.46	3.23	1.02	1.46	1.97	19.40
ZGS1169	BKLKD-18/20-8 OS W HDG	35,300	28,300	14.49	2.05	2.36	2.83	1.22	1.73	2.56	27.34
*GS1170	BKLKD-26-10 OS	60,169	48,048	19.13	3.94	4.33	4.02	1.77	2.13	2.68	59.52

*Not hot-dip galvanized.


Manufactured according to requirements in: DNV 2.7-1:2013, DNVGL-ST-0377:2016, DNVGL-ST-0388:2016 and NORSOK R-002:2017

Double Latch

Should the hook latch accidentally open, either through direct impact or excessive wear on the trigger, the extra latch is there to retain the load safely. The extra latch is designed to be easily operated.



Recessed Trigger
To avoid the trigger from being hit or damaged it has been recessed into the hook. This prevents the latch further from accidentally opening.

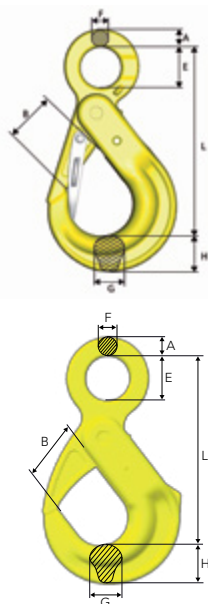

Safety Hook BK Offshore HDG

Stock No.	Code	WLL (lb) 4:1	WLL (lb) 5:1	Dimensions (in)							Weight (lb)
				A	L	B	E	F	G	H	
Z101355	BK-26-10 OS	60169	48048	—	13.46	3.94	3.15	.98	2.13	2.68	36.38
Z101364	BK-32-8 OS	72300	57745	—	15.75	4.72	3.54	1.18	2.44	3.39	52.03
	With double latch										
Z101373	BKD-26-10 OS	60169	—	1.38	13.58	2.83	3.15	0.98	2.13	2.68	37.04

Offshore material, impact toughness > 20 ft-lb (27 J) at -4°F.

Manufactured according to requirements in: DNV 2.7-1:2013, DNVGL-ST-0377:2016, DNVGL-ST-0388:2016 and NORSOK R-002:2017