


Safety Hook with Griplatch OBK

Stock No.	Code	WLL (lb)	Dimensions (in)							Weight (lb)
			A	L	B	E	F	G	H	
Z100218	OBK-22-8	"34,200	1.18	13.19	3.43	2.76	.94	1.57	2.24	22.49

Fulfills requirements in: EN 1677:2008, ISO 8539:2009, ASTM A952/A952M and AS 3776:2015.

4:1 Design Factor




Safety Hook BK

Stock No.	Code	WLL (lb)	Dimensions (in)						Weight (lb)
			L	B	E	F	G	H	
Z101357	BK-32-8	72,300	15.75	4.72	3.54	1.18	2.44	3.39	23.8

Fulfills requirements in: EN 1677:2008, ISO 8539:2009, ASTM A952/A952M and AS 3776:2015.

4:1 Design Factor

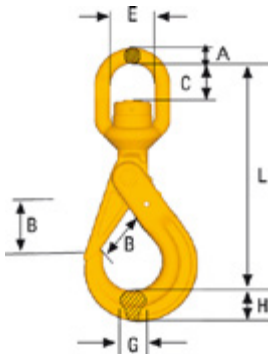


Swivel Safety Hook BCLK

Safety hook with ball-bearing for 360° rotation under full load.

Stock No.	Code	WLL (lb)	Dimensions (in)							Weight (lb)
			L	B	C	E	A	G	H	
Z101344	BCLK-32-8 OS	72,300	20.98	4.72	4.33	4.02	1.77	2.44	3.39	71.21

Fulfills requirements in: EN 1677:2008, ISO 8539:2009, ASTM A952/A952M and AS 3776:2015.

4:1 Design Factor



Sling Hook EK (without latch) and EKN (with latch)

Stock No.	Code	WLL (lb)	Dimensions (in)						Weight (lb)
			L	B	E	F	G	H	
Z100720	EK-32-8	72,300	13.11	4.13	2.99	1.50	2.40	3.15	39.02
Z100725	EKN-32-8	72,300	13.11	3.66	2.99	1.50	2.40	3.15	39.46

Fulfills requirements in: EN 1677:2008, ISO 8539:2009, ASTM A952/A952M and AS 3776:2015.

4:1 Design Factor