



S-1316



- All SHUR-LOC® hooks have the following features:
 - Forged alloy steel, Quenched & Tempered.
 - Recessed trigger design is flush with the hook body, protecting the trigger from potential damage.
 - Easy to operate with enlarged thumb access.
 - Positive lock latch is self-locking when the hook is loaded.
 - The SHUR-LOC® hook, if properly installed and locked, can be used for personnel lifting applications and meets the intent of OSHA Rule 1926.1431(g)(1)(i)(A) and 1926.1501(g)(4)(iv)(B).
 - Fatigue rated to 20,000 cycles at 1-1/2 times the Working Load Limit.
 - Contact Engineered Solutions for additional threading or Split-Nut options at thecrosbygroup.com/engineeredolutions.
- Eye Style incorporates these added features:
 - Individually Proof Tested to 2-1/2 times the chain Working Load Limit with certification.
 - S-1316 meets the performance requirements of EN1677-3.
 - Suitable for use with Grade 100 and Grade 80 chain.
 - Designed with 'engineered flat' to connect to S-1325 chain coupler.

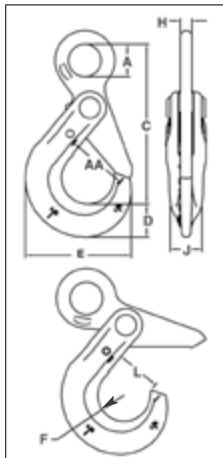

S-1318A

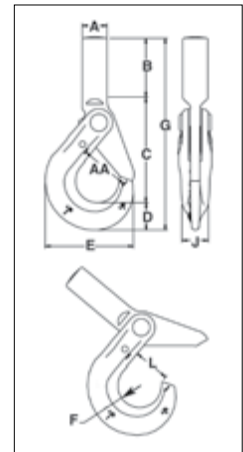

Crosby 8/10™

Fatigue Resistant

QT

CE

APPLICATION AND WARNING INFORMATION
SECTION 17

S-1316 SHUR-LOC® Eye Hook with Positive Locking Latch

Chain Size		Stock No.	Frame code	Grade 100 Alloy Chain Working Load Limit (lb) 4:1	Working Load Limit (lb) 5:1	Weight Each (lb)	Dimensions (in)								AA*	Replacement Trigger Kit Stock No.
(in)	(mm)						A	C	D	E	F	H	J	L		
-	6	1022896	D	3200	2560	.85	.78	3.95	.79	2.60	.67	.31	.63	1.14	1.50	6603010
1/4-5/16	7-8	1022914	G	5700	4560	1.80	1.08	5.31	1.10	3.50	.87	.39	.81	1.48	2.00	6603011
3/8	10	1022923	H	8800	7040	3.40	1.30	6.57	1.17	4.39	1.10	.51	.94	1.83	2.50	6603012
1/2	13	1022932	I	15000	12000	6.00	1.65	8.23	1.67	5.45	1.26	.67	1.16	2.22	3.00	6603013
5/8	16	1022941	J	22600	18000	15.1	2.20	10.06	2.04	6.56	1.50	.87	1.50	2.65	3.50	6603014
3/4	18-20	1022952	-	35300	28240	19.0	2.60	10.77	2.22	7.76	2.01	.87	2.03	3.52	5.00	6603015
7/8	22	1022943	-	42700	34160	28.0	2.87	12.49	2.45	8.75	2.27	.98	2.20	3.83	6.00	6603008
1	26	1022944	-	59700	47760	49.5	3.15	14.60	3.21	9.87	2.46	1.26	2.68	4.09	6.50	6603017

*Deformation indicators.

S-1318A SHUR-LOC® Shank Hook

Chain Size		Stock No.	Frame code	Grade 100 Alloy Chain Working Load Limit (lb)	Weight Each (lb)	Dimensions (in)										Replacement Trigger Kit Stock No.
(in)	(mm)					A†	B	C	D	E	F	G	J	L	AA*	
-	6	1098200	D	3200	1.00	.79	2.16	3.31	.79	2.60	.67	6.26	.63	1.16	1.50	6603010
1/4-5/16	7-8	1098209	G	5700	1.99	1.00	2.40	4.16	1.10	3.51	.87	7.66	.81	1.48	2.00	6603011
3/8	10	1098218	H	8800	3.56	1.14	2.95	5.14	1.17	4.39	1.10	9.26	.94	1.83	2.50	6603012
1/2	13	1098227	I	15000	7.00	1.34	3.35	6.31	1.67	5.49	1.26	11.33	1.16	2.22	3.00	6603013

4:1 Design Factor based on Grade 100 chain. *Deformation indicators. †Dimension before machining (as forged).

