



S-13326H

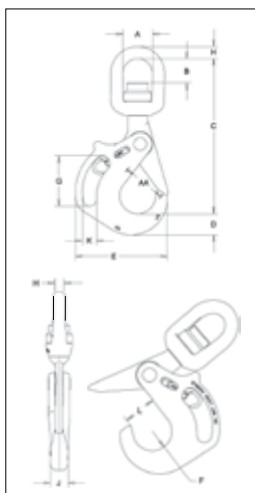

- The SHUR-LOC® Handle Hook allows the user to get a confident grip on a load with ease and comfort.
- Designed with a handle opening big enough to comfortably fit a gloved hand.
- Positive lock latch is self-locking when hook is loaded.
- Rated for both wire rope and use with Grade 80/100 chain.
- S-13326H Swivel Hook utilizes anti-friction bearing design which allows hook to rotate freely under load.
- Individually Proof Tested at 2-1/2 times the chain Working Load Limit with certification.
- The replaceable pull-trigger allows the user to easily open the SHUR-LOC's positive self-locking latch.
 - Ergonomically designed for easy use and precise control.
 - Secondary side trigger is recessed to avoid inadvertent release.
- Fatigue rated to 20,000 cycles at 1-1/2 times the Working Load Limit.
- Forged alloy steel, Quenched & Tempered.
- The SHUR-LOC® hook, if properly installed and locked, can be used for personnel lifting applications and meets the intent of OSHA Rule 1926.1431(g)(1)(i)(A) and 1926.1501(g)(4)(iv)(B).

S-1316AH

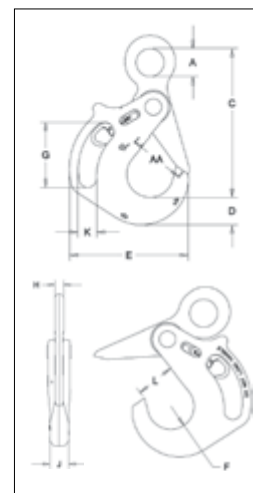

Crosby 8/10™ **Fatigue Resistant** **QUIC-CHECK®** **QT** **CE**

APPLICATION AND WARNING INFORMATION
SECTION 17

S-13326H SHUR-LOC® Handle Swivel Hooks with Bearings

Chain Size		Grade 100 Alloy Chain Working Load Limit (lb) 4:1*	Working Load Limit (lb) 5:1*	Frame Code	Stock No.	Weight Each (lb)	Dimensions (in)												Replacement Trigger Kit Stock No.
(in)	(mm)						A	B	C	D	E	F	G	H	J	K	L	AA*	
5/8	16	22,600	18,080	JA	1005014	26	2.75	2.26	14.47	1.97	8.55	1.78	4.69	1.13	1.73	1.32	2.80	4.00	6603032
3/4	18/20	35,300	28,240	KA	1005023	37	3.12	2.05	15.49	2.60	9.99	1.99	4.72	1.25	2.05	1.31	3.31	5.00	6603033
7/8	22	42,700	34,160	LA	1005041	57	4.09	3.65	19.11	2.72	11.48	2.24	5.35	1.50	2.44	1.57	3.66	6.00	6603034
1	26	59,700	47,760	NA	1005050	84	5.00	4.02	21.55	3.11	12.76	2.52	6.46	1.63	2.76	1.57	4.09	6.50	6603035

4:1 Design Factor. *Deformation indicators.

S-1316AH SHUR-LOC® Handle Eye Hook

Chain Size		Grade 100 Alloy Chain Working Load Limit (lb) 4:1*	Working Load Limit (lb) 5:1*	Frame Code	Stock No.	Weight Each (lb)	Dimensions (in)											Replacement Trigger Kit Stock No.
(in)	(mm)						A	C	D	E	F	G	H	J	K	L	AA*	
5/8	16	22,600	18,080	JA	1023579	18	2.01	10.69	1.97	8.55	1.78	4.69	0.79	1.73	1.32	2.79	4.00	6603032
3/4	18/20	35,300	28,240	KA	1023599	29	2.76	12.03	2.60	9.99	1.99	4.73	0.87	2.05	1.31	3.35	5.00	6603033
7/8	22	42,700	34,160	LA	1023607	39	3.15	13.50	2.72	11.48	2.24	5.35	0.91	2.44	1.63	3.70	6.00	6603034
1	26	59,700	47,760	NA	1023625	60	3.54	15.59	3.27	12.76	2.52	6.46	1.18	2.76	1.58	4.09	6.50	6603035

4:1 Design Factor. *Deformation indicators.