


L-1327



- For use with wire rope. Suitable for use with Grade 100 and Grade 80 chain. Working load limit needs to be de-rated to achieve a 5:1 design factor.
- Forged alloy steel, Quenched & Tempered.
- Each hook has a Product Identification Code (PIC) for material traceability, along with the size and the name Crosby.
- 25% stronger than Grade 80.
- Eye Sling Hooks incorporate QUIC-CHECK® deformation and angle indicators. (For detailed information, see the Crosby Value Added page at the beginning of this section.)
- When secured with the proper cotter pin through the hole in the tip of hook, meets the intent of OSHA Rule 1926.1431(g) and 1926.1501(g) for personnel lifting.
- Individually Proof Tested to 2.5 times the Working Load Limit with certification.
- Fatigue rated to 20,000 cycles at 1.5 times the Working Load Limit.

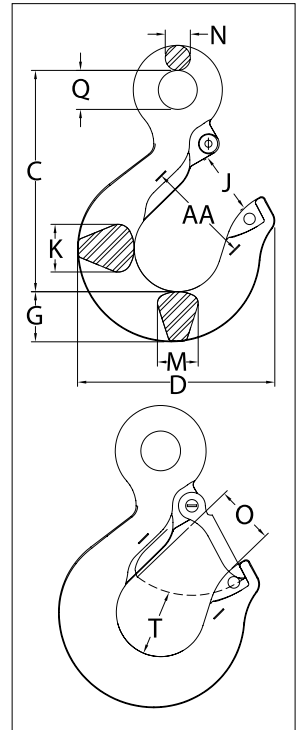

4

Crosby 8/10™

Fatigue Resistant

QUIC-CHECK®

QT

APPLICATION AND WARNING INFORMATION
SECTION 17

L-1327 Eye Sling Hook

Grade 10 Alloy Chain Size		Working Load Limit (t)	Hook ID Code	Stock No.	Weight Each (kg)	Dimensions (mm)											Replacement Latch Stock No.
(in)	(mm)					C	D	G	J	K	M	N	O	Q	T	AA*	
-	6	1.45	DA	1025860	.23	84.8	72.9	18.5	22.9	16.0	16.0	9.1	22.6	19.1	22.1	38.1	1096325
1/4-5/16	7 - 8	2.6	HA	1025869	.59	107	99.1	26.2	30.0	19.1	19.1	12.7	29.2	19.1	29.5	50.8	1096468
3/8	10	4.0	IA	1025878	1.04	127	110	30.2	38.9	30.2	25.4	14.2	35.6	23.9	31.2	63.5	1096515
1/2	13	6.8	JA	1025887	2.04	161	144	36.6	45.2	34.8	29.7	18.3	42.4	28.4	47.8	76.2	1096562
5/8	16	10.3	KA	1025896	3.81	189	172	47.8	60.5	42.2	36.6	22.4	56.1	33.3	51.6	102	1096609
3/4	18-20	16.0	KA	1025915	6.80	230	189	57.2	58.2	47.8	41.4	28.2	52.8	62.0	62.7	102	1096609
7/8	22-23	20.0	LA	1025924	9.39	256	211	65.8	63.5	55.6	49.3	32.3	57.7	72.1	66.5	102	1096657
1	26	27.1	NA	1025933	17.9	326	262	76.2	83.8	68.3	60.5	39.6	76.7	88.9	71.9	127	1096704
1 1/4	32	41.0	PA	1025942	47.6	462	357	116	108	95.3	81.0	50.8	76.2	114	98.6	178	1093717

4:1 Design Factor. *Deformation indicators.

