

- Made from Quenched & Tempered, Fine Grain Alloy Steel from European Steel Mills.
- Links are individually Proof Tested to values shown, with certification.
- Proof Test with max 60% inside width fixture to prevent localized point loading per ASTM A952.
- Each link is marked with Product Identification Code (PIC) for traceability, Grade, chain size, SWE, GUNNEBO and BG/DGUV manufacturing ID (H32).
- Fatigue rated to at least 20,000 cycles at 1.5 times the Working Load Limit.
- Designed for use with chain, wire or synthetic rope. Applications with wire and synthetic rope generally require a 5:1 Design Factor.
- 3/4-leg requires Gunnebo Industries CG, CGD, CL or CLD components. Engineered Flat compatible with Crosby S-1325 Omega Link.
- Fulfills or exceeds requirements in EN1677:2008, ASTM A952/A952M-02, AS 3775:2014 and AS 3776:2015.


## Master Link MFH with engineered flat

Designed for crane hooks, DIN 15401 and 15402. Designed for use with CL, CLD, CG and CGD.

3- and 4-leg chain slings require CLD / CGD.

Stock No.	Code	WLL (lb) 5:1		For chain size			Dimensions (in)				DIN 15401 (mm)	DIN 15402 (mm)	Weight (lb)
		EN 1677-4	A-952/A952M AS 3775.2-2014	1leg	2leg	3-4leg	L	E	D	Flat Thickness			
Z101262	MFH-1310-10	16,530	17,632	1/2"	3/8"	5/16"	9.05	4.92	0.86	3/8"	≤ 12	≤ 16	4.62
Z101263	MFH-1613-10	22,040	29,974	5/8"	1/2"	3/8"	9.84	5.31	1.10	1/2"	≤ 12	≤ 16	8.15
Z101264	MFH-2016-10	37,468	45,402	3/4"	5/8"	1/2"	11.0	5.31	1.25	5/8"	≤ 16	≤ 20	11.6
Z101265	MFH-2220-10	61,712	68,104	7/8"	3/4"	5/8"	12.5	6.88	1.57	3/4"	≤ 25	≤ 32	21.3
Z101266	MFHW-2220-10	61,712	61,712	7/8"	3/4"	5/8"	13.9	8.85	1.57	3/4"	≤ 50	≤ 63	24.4

5:1 Design Factor.

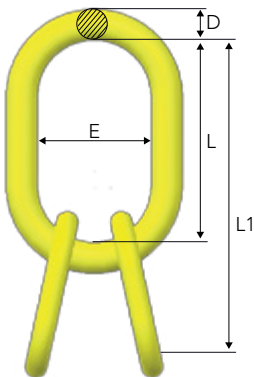

- Made from Quenched & Tempered, Fine Grain Alloy Steel from European Steel Mills.
- Links are individually Proof Tested to values shown, with certification.
- Proof Test with max 60% inside width fixture to prevent localized point loading per ASTM A952.
- Each link is marked with Product Identification Code (PIC) for traceability, Grade, chain size, SWE, GUNNEBO and BG/DGUV manufacturing ID (H32).
- Fatigue rated to at least 20,000 cycles at 1.5 times the Working Load Limit.
- Designed for use with chain, wire or synthetic rope. Applications with wire and synthetic rope generally require a 5:1 Design Factor.
- Engineered Flat on sub links up to MT-16-10.
- Fulfills or exceeds requirements in EN1677:2008, ASTM A952/A952M-02, AS 3775:2014 and AS 3776:2015.

## Grade 100 Welded Master Link Assembly MT

Designed for use with chain or wire rope. For 3 and 4-leg slings

Stock No.	Code	WLL (lb)	Proof Load (lb)	Grade 100 Chain Size 3/4-leg (in)	Grade 80 Chain Size 3/4-leg (in)	Dimensions (in)								Weight (lb)
						L1	L	E	D	I	e	d	G*	
Z200600	MT-6-10	9,477	23,606	7/32", 9/32"	7/32", 9/32"	10.2	5.5	3.1	0.7	4.7	2.4	0.5	7/32"	3.5
Z200800	MT-8-10	17,191	42,941	5/16"	5/16", 3/8"	11.8	6.3	3.7	0.9	5.5	3.1	0.7	5/16"	7.3
Z201000	MT-10-10	26,448	66,097	3/8"	1/2"	17.1	10.8	5.7	1.1	6.3	3.7	0.9	3/8"	15.7
Z201300	MT-13-10	46,284	115,782	1/2"	5/8"	18.3	10.8	5.7	1.3	7.5	4.3	1.1	1/2"	24.3
Z201600	MT-16-10	68,324	170,863	5/8"	3/4"	21.5	10.6	5.5	1.6	10.8	5.7	1.3	5/8"	39.7
Z202000	MT-20-10	105,792	264,613	3/4"	7/8"	24.0	13.4	7.1	1.8	10.6	5.5	1.6	3/4"	63.9
Z202200	MT-22-10	132,240	330,935	7/8"	1"	27.2	13.8	7.9	2.2	13.4	7.1	1.8	-	101.4
Z202600	MT-26-10	187,340	468,750	1"	1-1/4"	28.5	14.8	8.3	2.4	13.8	7.9	2.2	-	149.9
Z203200	MT-32-10	275,500	689,299	1-1/4"	-	32.5	17.7	10.2	3.1	14.8	8.3	2.4	-	242.5

5:1 Design Factor. \*Thickness of flat on sub link