


## A-341



- Forged alloy steel — Quenched & Tempered.
- Individually Proof Tested at 2 times Working Load Limit with certification.

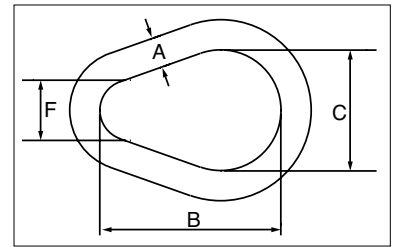

## A-341 Alloy Pear Shaped Links

5


Size (A) (mm)	Stock No	Working Load Limit		Weight Each (kg)	Dimensions (mm)		
		(t)	(lb)		B	C	F
13	1013575	3.15	7,000	.25	76.2	50.8	25.4
16	1013584	4.09	9,000	.50	95.3	63.5	31.8
19	1013595	5.59	12,300	.80	114	76.2	38.1
22	1013604	6.81	15,000	1.28	133	88.9	44.5
25	1013613	11.0	24,360	1.91	152	102	51.0
28	1013622	13.9	30,600	2.83	171	114	57.0
32	1013631	16.4	36,000	3.74	191	127	63.5
35	1013640	19.5	43,000	5.10	210	140	70.0
38	1013654	24.7	54,300	6.46	229	152	76.0
44	1013672	38.6	84,900	10.2	267	178	89.0
51	1013690	46.6	102,600	15.4	305	203	102

5:1 Design Factor. Based on single leg sling (in-line load), or resultant load on multiple legs with an included angle less than or equal to 120°.

## G-341 / S-341



- Forged carbon steel - Quenched & Tempered.
- Self colored (S) or hot-dip galvanized (G).

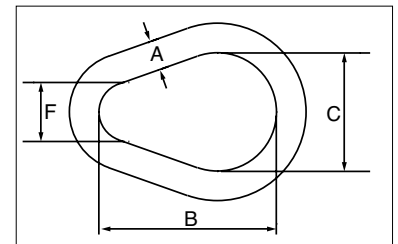

## G-341 / S-341 Weldless Sling Links

Size (A) (mm)	Stock No.		Working Load Limit Single Pull (t)	Weight Each (kg)	Dimensions (mm)		
	G-341 Galv.	S-341 S.C.			B	C	F
10	1013897	1013904	.82	0.10	57.2	38.1	19.1
13	1013913	1013922	1.32	.25	76.2	50.8	25.4
16	1013931	1013940	1.91	.48	95.5	63.5	31.8
19	1013959	1013968	2.72	.85	114	76.2	38.1
22	1013977	1013986	3.76	1.25	133	88.9	44.5
25	1013995	1014002	4.90	1.97	152	102	51.0
32	1014011	1014020	7.60	3.45	197	127	63.5
35	1014039	1014048	9.30	5.13	210	140	70.0

6:1 Design Factor. Based on single leg sling (in-line load), or resultant load on multiple legs with an included angle less than or equal to 120°.