


Master Grab MG

For use with Grade 100 or Grade 80 chain. "All-in-one" compact top link.

Stock No.	Code	WLL (lb)	Dimensions (in)				Weight (lb)
			L	A	E	D	
B14710	MG-6-10	3306	5.71	3.46	2.36	.59	1.10
B14711	MG-8-10	5700	6.73	3.62	2.36	.71	1.98
B14712	MG-10-10	8800	8.31	4.45	2.95	.87	3.97
B14713	MG-13-10	15000	10.28	5.43	3.54	1.02	7.72
B14714	MG-16-10	22600	12.24	6.18	4.13	1.22	13.45

4:1 Design Factor. Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M and AS 3776:2015.

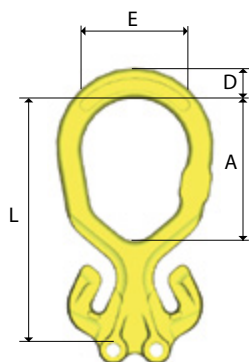

Master Grab Duo MGD

For use with Grade 100 or Grade 80 chain. "All-in-one" compact top link for 2-leg slings.


Stock No.	Code	WLL (lb)	Dimensions (in)				Weight (lb)
			L	A	E	D	
B14700	MGD-6-10	4700	5.7	3.5	2.4	.67	1.5
B14701U	MGD-8-10	9900	6.7	3.9	3.0	.83	2.9
B14702U	MGD-10-10	15200	8.3	4.9	3.5	.94	5.1
B14703U	MGD-13-10	26000	10.3	5.9	4.1	1.2	11.5
B14704U	MGD-16-10	39100	12.2	6.9	4.7	1.4	17.4

4:1 Design Factor. Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M and AS 3776:2015.

Note: The maximum in service temperature is 392°F.

Master Grab Duo

With the all-in-one compact top link Master Grab Duo (MGD), every chain leg can instantly be altered between a straight lift to a looped sling in a matter of seconds. The innovative design with few components and built-in shortening function makes the MGD the perfect foundation for a cost-efficient and safe chain sling solution.

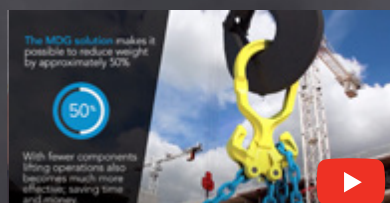

Watch the Master Grab Duo video at kitocrosby.com/MGD

