




Chain KLZ HDG

Heat treatment:
Quenched & Tempered

Surface treatment:
Hot-dip galvanized

Fulfills the requirements in:
EN 818-2:2008 (material dim. $\varnothing$ +10%)
ISO 1461:2009
ASTM A391/A391M-07 2012 (material dim. $\varnothing$ +10%)

Stock No.	Code	WLL (t)	Link Dimensions (mm)			Weight kg/ m	Manufacturing Proof Force (kN)	WLL (kN)	Delivery Length
			d	P	w1				
ZG802306	KLZ-6-8 HDG	1.1	6.6	18	8.9	1.0	36.8	45.2	1 x 100 m
ZG802307	KLZ-8-8 HDG	2.0	8.8	24	11.2	1.7	63.0	80.6	1 x 100 m
ZG802308	KLZ-10-8 HDG	3.2	11.0	30	14.4	2.6	98.0	130	1 x 100 m
ZG802309	KLZ-13-8 HDG	5.4	14.3	39	19.2	4.5	166	214	1 x 100 m
ZG802310	KLZ-16-8 HDG	8.2	17.3	48	23.0	6.7	251	322	1 x 100 m

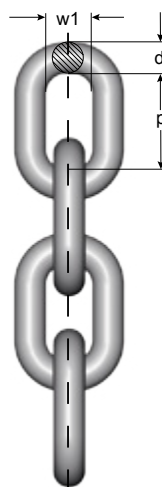

Short Link Chain KLFZ, Grade 7

Heat treatment:
Quenched & Tempered

Surface treatment:
Hot-dip galvanized

Not for lifting purposes

Stock No.	Code	Link Dimensions (mm)			Weight kg / m	Min. Breaking Load (t)	Delivery Length
		d nom.	P	w1			
Z800666	KLFZ-10-7	10	30	14.0	2.2	11.0	1 x 100
Z800667	KLFZ-11-7	11	33	15.0	2.7	12.0	1 x 100
Z802329	KLFZ-13-7	13	39	17.2	3.8	18.0	1 x 100
Z803329	KLFZ-14-7	14	42	21.5	4.5	19.2	1 x 100
Z802901	KLFZ-16-7	16	48	27.0	5.6	26.7	1 x 100
Z801409	KLFZ-17-7	17	48	23.2	6.4	30.0	1 x 100
Z801407	KLFZ-19-7	19	57	27.0	8.1	40.0	1 x 100

Fulfills requirements in: EN 1461:2009 (Average surface thickness 85 μ m)