


Peerless 8® Alloy Chain



- Finish – black paint.
- Permanently embossed with CG (Crosby Group) and 8 (Grade).
- Proof Tested at 2.5 times the Working Load Limit with certification.
- Meets EN 818-2 for Grade 8 chain.

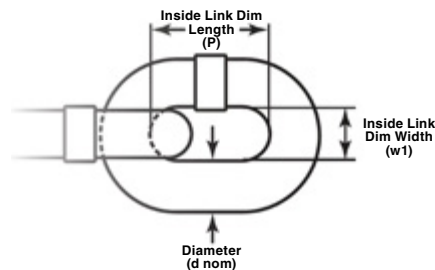

Grade 80 Alloy Chain Recommended for overhead lifting applications

Chain Size (mm)	Stock No.	Meters Per Drum / Crate	Working Load Limit (t)	Dimensions (mm)			Breaking Force (kN)	Manufacturing Proof Force (kN)	Weight Per meter (kg/m)
				d nom.	P	w1			
6	1244915	200	1.1	6	18	8.5	45.2	28.3	0.8
7	1244985	200	1.5	7	21	10	62	38.5	1.1
8	1245055	200	2.0	8	24	11	80.6	50.3	1.4
10	1245125	200	3.2	10	30	14	130	79	2.3
13	1245195	150	5.4	13	39	18.8	214	133	3.8
16	1245265	100	8.2	16	48	21.9	322	201	5.6
19	1245360	50	11.6	19	57	27	457	284	7.8
20	1245364	50	12.8	20	60	25	504	315	9.9
22	1245368	50	15.5	22	66	29.5	610	380	10.6
23	1245372	50	16.0	23	69	32	665	415	11.8
26	1245376	50	21.6	26	78	35	850	531	14.8
32	1245380	50	32.8	32	96	41.6	1300	804	21.6

4:1 Design Factor.

Crosby provides two methods of attaching Spectrum 8® chain to Crosby fittings:

CONNECTING AND COUPLER CHAIN LINKS



A-1337
LOK-A-LOY®
Connecting Link



S-1325
Grade 100
Coupler Link