


SB-427



- Available in six sizes from 1/2" to 1-1/2" (13mm - 38mm).
- Button Spelter terminations have a 100% efficiency rating, based on the catalog strength of the wire rope.
- Designed for use with mobile cranes. Can be used to terminate high performance, rotation resistant ropes, and standard 6 strand ropes.
- Easy to install assembly utilizes Crosby WIRELOCK® socketing compound.
- Sockets and buttons are re-usable.
- Replacement buttons and sockets are available.
- Locking feature available to prevent rotation of rope.
- Button contains cap with eye that can be attached to, and used to pull, rope during reeving process.
- Manufactured to the requirements of API-2C.

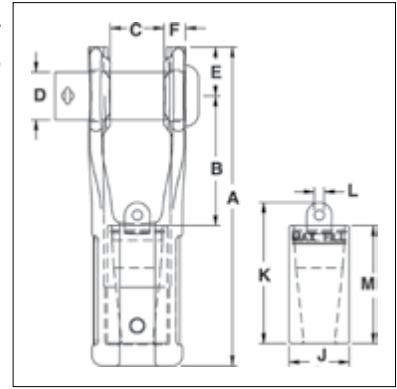

SB-427 Button Spelter Sockets & SB-427TB (Bolt, Nut and Cotter Pin)

APPLICATION AND WARNING INFORMATION
SECTION 17

Wire Rope Dia.		Assembly w/Round Pin Stock No.	Assembly w/Bolt/Nut/Cotter Stock No.	Weight Each (lb)	Replacement Button Kit Stock No.	Replacement Round Pin Kit Stock No.	Replacement Bolt/Nut/Cotter Kit Stock No.	WIRELOCK Stock No.	WIRELOCK Kit Size (cc)	WIRELOCK Required (cc)
(in)	(mm)	SB-427	SB-427TB		427B	G-4080	G-4082			
1/2 - 5/8	13-16	1052005	1052406	6.1	1052309	1083188	2036572	1039602	100	35
5/8 - 3/4	16-19	1052014	1052415	10.3	1052212	48276	2038976	1039602	100	60
3/4 - 7/8	19-22	1052023	1052424	17.1	1052221	1083222	2038978	1039602	100	100
7/8 - 1	22-26	1052032	1052433	29.2	1052230	1083240	2037295	1039602 x2	100	140
1-1/8 - 1-1/4	28-32	1052041	1052442	46.0	1052249	1083268	2038983	1039604	250	250
1-3/8 - 1-1/2	35-38	1052050	1052451	78.0	1052258	1083287	2038987	1039606	500	420

Wire Rope Size		Assembly w/Round Pin Stock No.	Assembly w/Bolt/Nut/Cotter Stock No.	Dimensions (in)									
(in)	(mm)	SB-427	SB-427TB	A	B	C ± .06	D	E	F	J	K	L	M
1/2 - 5/8	13-16	1052005	1052406	7.94	3.23	1.28	1.19	1.22	.57	1.50	3.50	.25	2.93
5/8 - 3/4	16-19	1052014	1052415	9.44	3.88	1.53	1.38	1.44	.66	1.75	4.28	.38	3.43
3/4 - 7/8	19-22	1052023	1052424	10.81	4.41	1.78	1.62	1.69	.75	2.06	4.78	.38	3.96
7/8 - 1	22-26	1052032	1052433	12.88	5.48	2.03	2.00	2.00	.89	2.44	5.62	.62	4.52
1-1/8 - 1-1/4	28-32	1052041	1052442	14.90	5.68	2.53	2.25	2.50	1.11	2.94	7.08	.75	5.72
1-3/8 - 1-1/2	35-38	1052050	1052451	18.06	7.17	3.03	2.75	2.75	1.24	3.62	8.08	.75	6.76