


G-414



- Available in hot-dip galvanized or stainless steel (Type 304).
- Stainless steel recommended for more corrosive environments where greater protection is required.
- Greater protection against wear and deformation of the wire rope eye.
- Longer service life.
- Meets the performance requirements of Federal Specification FF-T-276C Type III, except for those provisions required of the contractor.
- Meets the performance requirements of EN13411-1:2002.

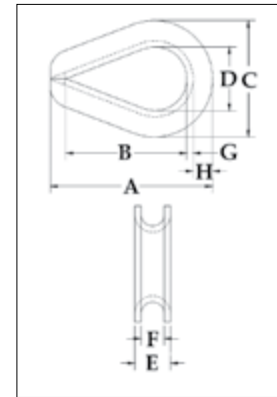


Extra Heavy Wire Rope Thimbles

Rope Diameter		G-414 Stock No	Weight Per 100 (kg)	Dimensions (mm)							
(in)	(mm)			A	B	C	D	E	F	G	H
1/4	6-7	1037639	2.95	55.5	41.4	38.1	22.4	11.2	7.10	1.50	5.85
5/16	8	1037657	5.35	63.5	47.8	46.0	26.9	14.0	8.65	2.05	7.10
3/8	9-10	1037675	9.80	73.0	54.0	54.0	28.7	16.8	10.4	2.80	8.65
7/16	11-12	1037693	15.7	82.5	60.5	60.5	31.8	18.8	11.9	3.30	9.65
1/2 - 9/16	13-15	1037719	23.1	92.0	70.0	70.0	38.1	23.4	13.5	3.55	10.4
5/8	16	1037755	34.3	108	82.5	79.5	44.5	26.2	16.8	4.05	12.7
3/4	18-20	1037773	72	127	95.5	96.5	51.0	33.0	19.8	5.60	16.8
7/8	22	1037791	81	140	108	108	57.0	37.3	23.9	5.60	19.1
1	24-26	1037817	142	156	114	125	63.5	44.5	26.9	6.35	22.4
1-1/8 - 1-1/4	28-32	1037835	181	178	130	149	73.0	47.8	33.3	6.35	28.7
1-1/4 - 1-3/8	32-35	1037853	402	230	165	173	89.0	57.2	36.6	9.65	28.7
1-3/8 - 1-1/2	35-38	1037871	587	229	159	181	89.0	66.5	39.6	12.7	28.7
1-5/8	40	1037899	771	286	203	207	102	76.2	43.7	12.7	35.1
1-3/4	44	1037915	805	310	229	216	114	77.7	46.7	12.7	33.3
1-7/8 - 2	48-52	1037933	1259	384	305	264	152	85.9	53.0	12.7	38.1
2-1/4	56	1037951	1792	435	356	302	178	98.6	60.5	16.0	41.4

G-414 SL



- Prevents the shackle from being removed and replaced in the field, which could compromise the certified integrity of the sling assembly.
- Available in hot-dip galvanized. Crosby's shackle locking thimbles are galvanized after the welding of the wedge has been completed.
- Greater protection against wear and deformation of the wire rope eye.
- Longer service life.
- Meets the performance requirements of Federal Specification FF-T-276C Type III, except for those provisions required of the contractor.
- Meets the performance requirements of EN13411-1:2002

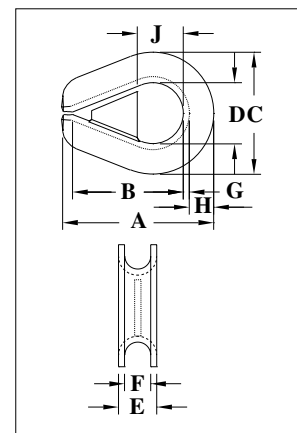

Extra Heavy Wire Rope Thimbles (Shackle-Loc)

Rope Diameter		Stock No	Weight Per 100 (kg)	Dimensions (mm)							
(in)	(mm)			A	B	C	D	E	F	G	H
3/8	9-10	1036800	9.80	73.0	54.0	54.0	28.7	16.8	10.4	2.80	8.65
1/2 - 9/16	13-15	1036808	23.1	92.0	70.0	70.0	38.1	23.4	13.5	3.55	10.4
5/8	16	1036817	34.3	108	82.5	79.5	44.5	26.2	16.8	4.05	12.7
3/4	18-20	1036826	72	127	95.5	96.5	51.0	33.0	19.8	5.60	16.8
7/8	22	1036835	81	140	108	108	57.0	37.3	23.9	5.60	19.1
1	24-26	1036844	142	156	114	125	63.5	44.5	26.9	6.35	22.4
1-1/8 - 1-1/4	28-32	1036853	181	178	130	149	73.0	47.8	33.3	6.35	28.7
1-3/8 - 1-1/2	35-38	1036862	587	229	159	181	89.0	66.5	39.6	12.7	28.7