


ROV Shackles


The ROV Retrieve Shackle is designed for smooth and easy use in retrieving and releasing subsea lifting and rigging operations. It has no loose parts in closed or opened position. Therefore there is no need for wires or monkey fists. The high visibility handles are close-die forged and has double safety functions. The shark tooth locking with indicator that will show if the shackle is in open or locked position as well as the spring loaded handle. The handle is the same size, regardless of size of shackle. The ROV Retrieve Shackle No. 861 is an easy to operate shackle, saving valuable time and money.

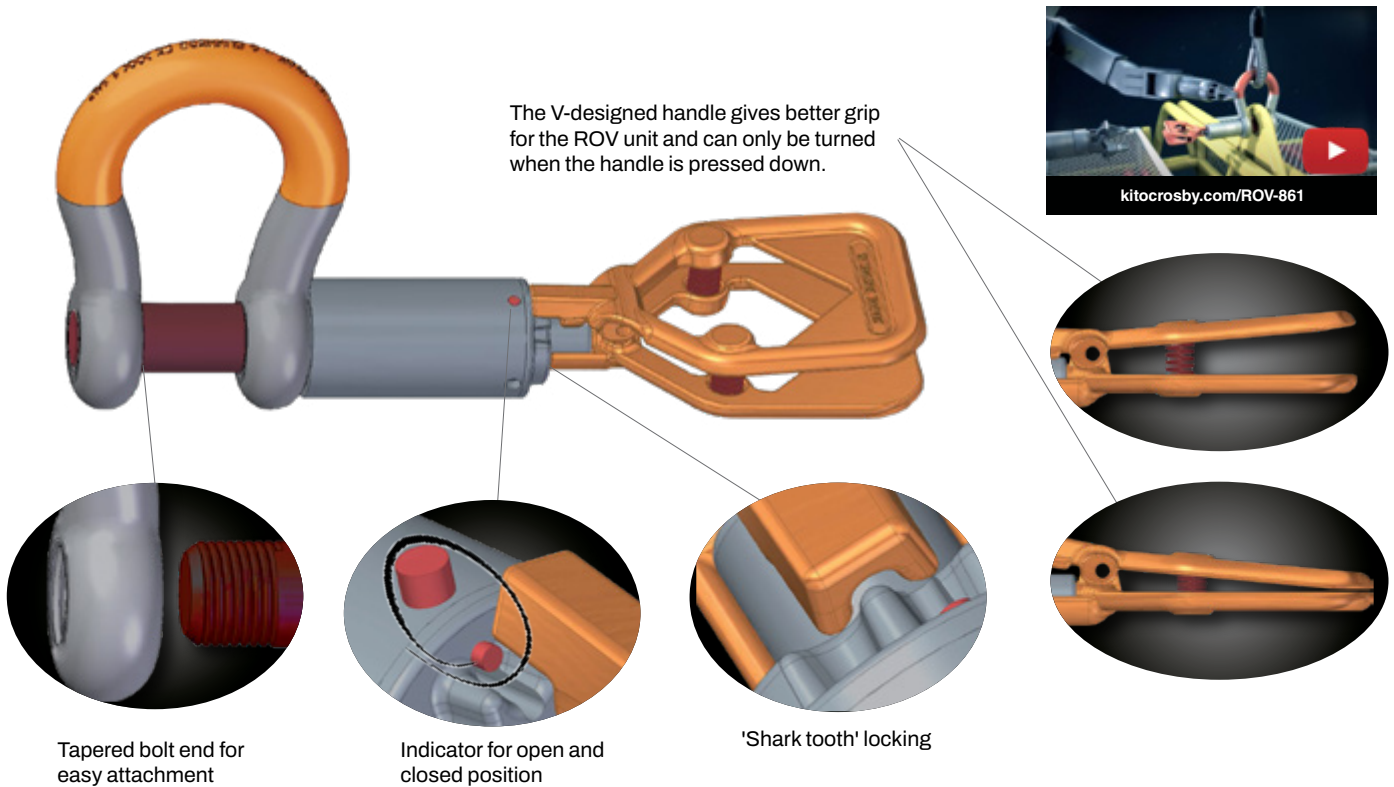

ROV Retrieve Shackle No 861

All shackles have unique markings.

- Dim. according to EN 13889
- High tensile steel, Quenched & Tempered
- All load bearing parts hot-dip galvanized
- Test certificate and traceable 3.1 certificate supplied upon request.
- Temperature: -40 °F to 392 °F

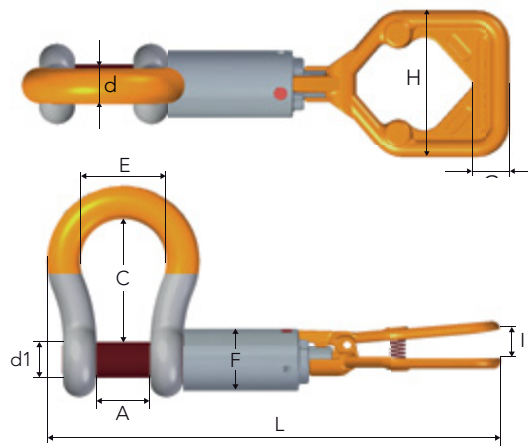

Stock No.	WLL (t)	Design Factor	Dimensions (in)										Weight (lb)
			d1	d	A	C	E	F	L	I	H	G	
A086128	9.5	6:1	1.26	1.10	1.81	4.25	2.91	2.36	17.32	1.22	5.20	1.30	14.3
A086132	12.0	6:1	1.38	1.26	2.05	4.69	3.27	2.36	18.11	1.22	5.20	1.30	17.6
A086138	17.0	6:1	1.65	1.50	2.36	5.75	3.86	2.50	19.72	1.22	5.20	1.30	23.1
A086145	25.0	6:1	1.97	1.77	2.91	7.01	5.00	2.76	22.24	1.22	5.20	1.30	36.3
A086152	35.0	6:1	2.24	1.97	3.27	7.76	5.43	2.99	23.78	1.22	5.20	1.30	45.1
A086164	55.0	6:1	2.76	2.56	4.13	10.24	7.09	3.46	28.03	1.22	5.20	1.30	92.5
A086176	85.0	5:1	3.27	3.31	5.24	12.99	7.48	4.25	29.33	1.22	5.20	1.30	170.25