


HR-1200



- Body components are alloy steel - Quenched & Tempered.
- Rated at 100% of Working Load Limit for angles up to 90 degrees.
- Each product is stamped with a Product Identification Code (PIC) for material traceability, along with a Working Load Limit, and the name Crosby or "CG."
- Hoist ring body is furnished with a yellow chromate finish for improved corrosion resistance.
- Utilize standard Crosby Red Pin® Shackles to connect to wire rope or synthetic slings (sold separately).
- Multiple bolt lengths available to meet specific application requirements.
- Individually Proof Tested to 2-1/2 times Working Load Limit.

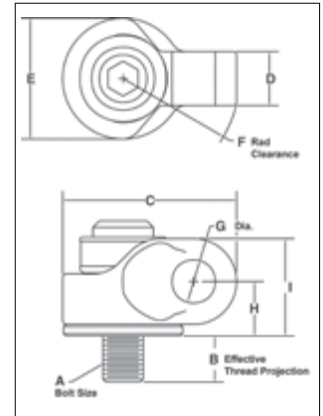

HR-1200 UNC Side Pull Hoist Rings

Weight Each (kg)	Working Load Limit (kg)	Stock No.	Hoist Ring Bolt Torque (Nm)	Bolt Size A (in)	Eff. Thread Proj. (mm) B	Dimensions (mm)							Recommended Shackles		Replacement Bolt Kit Stock No.
						C	D	E	F	Dia. G	H	I	Shackles 209, 210, 213, 215, 2130, 2150	Web Shackles S-281	
													Nominal Size (in)	Web Size (mm)	
.16	290	1067700	10	5/16-18x1.50	15.0	49.0	18.3	25.4	39.6	20.3	21.6	36.3	1/2, 5/8	50	1015502
.16	360	1067704	16	3/8-16x1.50	15.0	49.0	18.3	25.4	39.6	20.3	21.6	36.3	1/2, 5/8	50	1015533
.64	900	1067708	38	1/2-13x2.00	18.0	75.4	24.6	50.8	54.1	23.6	27.2	45.5	5/8, 3/4	50, 35	1015566
.64	900	1067712	38	1/2-13x2.50	30.7	75.4	24.6	50.8	54.1	23.6	27.2	45.5	5/8, 3/4	50, 35	1015575
.68	1360	1067716	81	5/8-11x2.00	18.0	75.4	24.6	50.8	54.1	23.6	27.2	45.5	5/8, 3/4	50, 35	1015599
.68	1360	1067720	81	5/8-11x2.75	37.1	75.4	24.6	50.8	54.1	23.6	27.2	45.5	5/8, 3/4	50, 35	1015610
2.04	2260	1067724	136	3/4-10x2.75	22.9	110	34.0	76.2	76.2	27.2	34.3	61.5	7/8	50	1015646
2.09	2260	1067728	136	3/4-10x3.50	41.9	110	34.0	76.2	76.2	27.2	34.3	61.5	7/8	50	1015676
2.09	2940	1067732	217	7/8-9x2.75	22.9	110	34.0	76.2	76.2	27.2	34.3	61.5	7/8	50	1015698
2.18	2940	1067736	217	7/8-9x3.50	41.9	110	34.0	76.2	76.2	27.2	34.3	61.5	7/8	50	1015707
2.18	3620	1067740	312	1 -8x3.00	29.2	110	34.0	76.2	76.2	27.2	34.3	61.5	7/8	50	1015731
2.27	3620	1067744	312	1 -8x4.00	54.6	110	34.0	76.2	76.2	27.2	34.3	61.5	7/8	50	1015740
4.63	6350	1067748	637	1-1/4-7x4.5	56.4	142	39.9	95.3	99.3	37.3	48.8	86.9	1, 1-1/8, 1-1/4	75	1015762
10.7	7800	1067756	1085	1-1/2-6x6.5	75.7	186	52.3	121	132	53.6	61.2	109	1-3/8, 1-1/2, 1-3/4	-	-
11.5	13150	1067764	1491	2 -4.5x6.5	75.7	186	52.3	121	132	53.6	61.2	109	1-3/8, 1-1/2, 1-3/4	-	-

5:1 Design Factor.

HR-1200M Metric Side Pull Hoist Rings

Weight Each (kg)	Working Load Limit (kg)	Stock No.	Hoist Ring Bolt Torque (Nm)	Bolt Size A (mm)	Eff. Thread Proj. (mm) B	Dimensions (mm)							Recommended Shackles		Replacement Bolt Kit Stock No.
						C	D	E	F	G	H	I	Shackles 209, 210, 213, 215, 2130, 2150	Web Shackles S-281	
													Nominal Size (in)	Web Size (mm)	
.18	300	1067803	10	M8x1.25x40	16.9	49.0	18.3	25.4	39.6	20.3	21.6	36.3	1/2, 5/8	50	1015875
.18	400	1067807	16	M10x1.50x40	16.9	49.0	18.3	25.4	39.6	20.3	21.6	36.3	1/2, 5/8	50	1015884
.63	1000	1067811	38	M12x1.75x50	17.2	75.4	24.6	50.8	54.1	23.6	27.2	45.5	5/8, 3/4	50, 35	1015897
.68	1400	1067815	81	M16x2.0x60	27.2	75.4	24.6	50.8	54.1	23.6	27.2	45.5	5/8, 3/4	50, 35	1015906
2.0	2250	1067823	136	M20x2.5x75	28.1	110	34.0	76.2	76.2	27.2	34.4	61.5	7/8	50	1015930
2.2	3500	1067827	312	M24x3.0x80	33.1	110	34.0	76.2	76.2	27.2	34.4	61.5	7/8	50	1015941
4.5	6250	1067831	637	M30x3.5x120	65.1	142	39.9	95.3	99.3	37.3	48.8	86.9	1, 1-1/8, 1-1/4	75	1015952
10.4	7750	1067835	1005	M36x4.0x150	60.6	186	52.3	121	132	53.6	61.2	109	1-3/8, 1-1/2, 1-3/4	-	-
10.7	10000	1067839	1005	M42x4.5x160	70.6	186	52.3	121	132	53.6	61.2	109	1-3/8, 1-1/2, 1-3/4	-	-
11.0	13000	1067843	1350	M48x5.0x160	70.6	186	52.3	121	132	53.6	61.2	109	1-3/8, 1-1/2, 1-3/4	-	-

5:1 Design Factor.



APPLICATION AND WARNING INFORMATION
SECTION 17