

IPPE10B



For lifting and transporting non-bendable sheet metal in a horizontal position.

- Available in capacities of 3 through 12 metric tons (higher Working Load Limits are available upon request).
- Wide variety of jaw openings available: 0 to 16.5".
- Welded alloy steel body for strength and smaller size. Forged alloy components, where required.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Crosby IP logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body. User manual with test certificate is included with each clamp.
- Maintenance and repair kits are available.
- IPPE10: Magnets in foot plate (also applies for D and H Type).
- IPPE10NM: Non-marring (also applies for D and H-Type).
- IPPE10: Temperature range -40 °F (-40 °C) to +212 °F (+100 °C)
- IPPE10NM: Temperature range -4 °F (-20 °C) to +158 °F (+70 °C)

IPPE10DNM




Model IPPE10 / IPPE10NM




Model	Working Load Limit (Per Pair) (t)*	Stock No.	Weight Each (lb)	Dimensions (in)									
				Jaw A	B	C	D	E	F	G	H	J	L
IPPE10B	3	2703862	25.0	0 - 7.13	8.03	12.68	0.79	1.02	2.60	0.79	3.94	1.97	0.59
IPPE10B	6	2703871	35.0	0 - 7.13	8.66	13.39	0.98	1.18	2.91	0.79	5.51	2.36	0.51
IPPE10B	9	2703888	54	0 - 7.13	9.76	14.37	0.98	1.34	3.54	0.79	7.48	2.76	0.51
IPPE10B	12	2703921	72	0 - 7.13	10.31	14.80	1.18	1.57	3.54	0.98	7.87	2.76	0.71
With larger jaw opening													
IPPE10D	3	2703882	25.0	0 - 11.8	8.03	17.40	0.79	1.02	2.60	0.79	3.94	1.97	0.59
IPPE10H	6	2703875	35.0	0 - 16.5	8.66	22.83	0.98	1.18	2.91	0.79	5.51	2.36	0.51
IPPE10H	9	2703890	54	0 - 16.5	9.76	23.82	0.98	1.34	3.54	0.79	7.48	2.76	0.51
IPPE10H	12	2703923	72	0 - 16.5	10.31	24.25	1.18	1.57	3.54	0.98	7.87	2.76	0.71
Non-Marring types													
IPPE10BNM	3	2703864	27	0 - 7.13	8.03	12.68	1.18	1.18	2.68	0.79	3.94	1.97	0.59
IPPE10BNM	6	2703872	38	0 - 7.13	8.66	13.39	1.38	1.38	2.99	0.79	5.51	2.36	0.51
IPPE10BNM	9	2703894	61.0	0 - 7.13	9.76	14.37	1.38	1.38	3.62	0.79	7.48	2.76	0.51
IPPE10BNM	12	2703927	77.0	0 - 7.13	10.31	14.80	1.57	1.57	3.62	0.98	7.87	2.76	0.59
Non-Marring types with larger jaw opening													
IPPE10DNM	3	2703886	27	0 - 11.8	8.03	17.40	0.79	1.02	2.60	0.79	3.94	1.97	0.59
IPPE10HNM	6	2703879	38	0 - 16.5	8.66	22.83	0.98	1.18	2.91	0.79	5.51	2.36	0.51
IPPE10HNM	9	2703920	61.0	0 - 16.5	9.76	23.82	0.98	1.34	3.54	0.79	7.48	2.76	0.51
IPPE10HNM	12	2703929	77.0	0 - 16.5	10.31	24.25	1.18	1.57	3.54	0.98	7.87	2.76	0.71

*Design Factor based on EN 13155 and ASME B30.20..

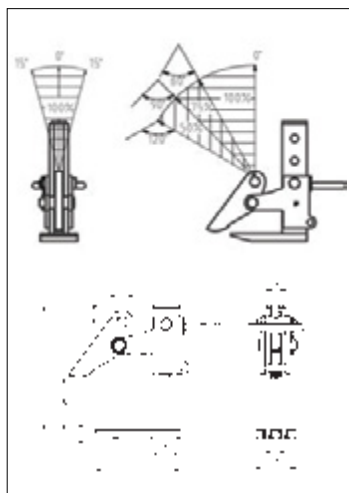

IPPE10

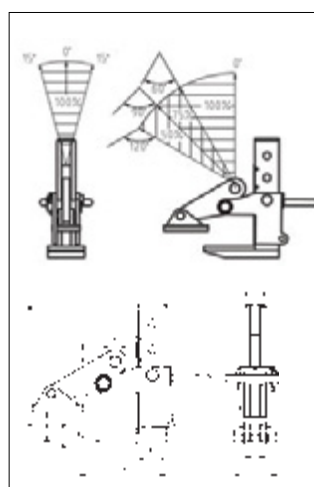

IPPE10NM