




IPPH



**For lifting pipe, tube, or any similarly shaped fabrications.**

- Crosby IP Pipe Hooks provide a fast and efficient method for lifting pipe, tube or any similarly shaped fabrications.
- Alloy steel plate construction.
- Equipped with a convenient handle.
- Equipped with a Bolt Type Shackle.
- Optional non marring inserts available.
- Used in pairs with 45° - 60° horizontal angle or 60° - 90° included angle.
- Temperature range -40 °F (-40 °C) to +212 °F (+100 °C)

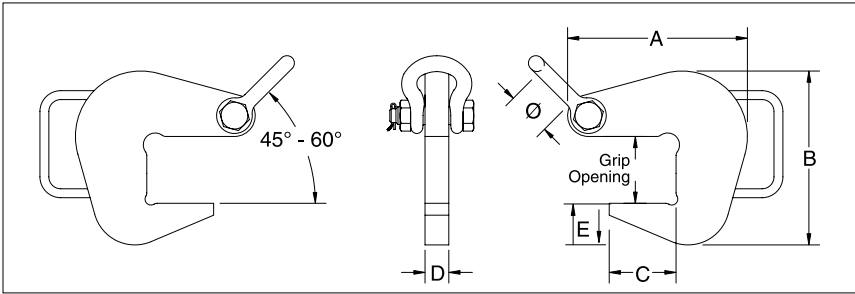

Model IPPH



| Model | Working Load Limit<br>Per Pair (t)* | Stock No. | Weight Each<br>(lb) | Grip Open-<br>ing (in)** | Dimensions (in) |       |      |      |      |      | Shackle Size<br>(in) | Optional Nylon<br>(PA6) Inserts |
|-------|-------------------------------------|-----------|---------------------|--------------------------|-----------------|-------|------|------|------|------|----------------------|---------------------------------|
|       |                                     |           |                     |                          | A               | B     | C    | D    | E    | Ø    |                      |                                 |
| IPPH  | 2                                   | 2734500   | 5.95                | 2.06                     | 5.81            | 5.06  | 2.06 | 1.00 | 1.25 | 1.69 | 5/8                  | 2734900<br>2734909              |
| IPPH  | 4                                   | 2734509   | 9.92                | 2.81                     | 7.56            | 7.31  | 2.81 | 1.00 | 1.75 | 1.69 | 5/8                  | 2734918                         |
| IPPH  | 6                                   | 2734518   | 16.98               | 4.06                     | 10.18           | 10.06 | 4.06 | 1.00 | 2.25 | 2.00 | 3/4                  | 2734927                         |
| IPPH  | 10                                  | 2734527   | 38.14               | 6.06                     | 14.81           | 15.06 | 6.06 | 1.00 | 3.50 | 2.69 | 1                    | 2734936                         |
| IPPH  | 15                                  | 2734536   | 48.06               | 6.06                     | 14.81           | 15.43 | 6.06 | 1.18 | 3.86 | 2.91 | 1 1/8                | 2734936                         |
| IPPH  | 20                                  | 2734545   | 50.93               | 6.06                     | 14.81           | 16.02 | 6.06 | 1.18 | 4.45 | 2.91 | 1 1/8                | 2734936                         |

\*Design factor based on EN13155 and ASME B30.20.

\*\*NOTE: To determine grip opening when equipped with an insert, see the dimensions in the Pipe Hook Inserts table below.

IPPHI



- Replaceable nylon (PA6) inserts for use with the IPPHI Pipe Hook that minimizes thread and pipe damage.

**Pipe Hook Inserts**

| Model | Stock No. | ID of Pipe<br>(in) | Grip Opening<br>(in) |
|-------|-----------|--------------------|----------------------|
| IPPHI | 2734900   | 3-12               | 1.61                 |
|       | 2734909   | 12-18              | 1.73                 |
|       | 2734918   | 18-30              | 2.48                 |
|       | 2734927   | 30-42              | 3.74                 |
|       | 2734936   | 42-52              | 5.71                 |
|       | 2734945   | 42-52              | 5.71                 |

