


IPSTARTEC11



For Lifting, Transferring and Controlled Tilting of Steel Beams.

- Available in capacities of 1.5 and 2.5 metric tons.
- Jaw openings available: .25" to .75".
- Welded alloy steel body for strength and smaller size. Forged alloy, components where required.
- Equipped with handle for easy placement.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Crosby IP logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body. User manual with test certificate is included with each clamp.
- Maintenance replacement parts are available.
- Temperature range -40 °F (-40 °C) to +212 °F (+100 °C)

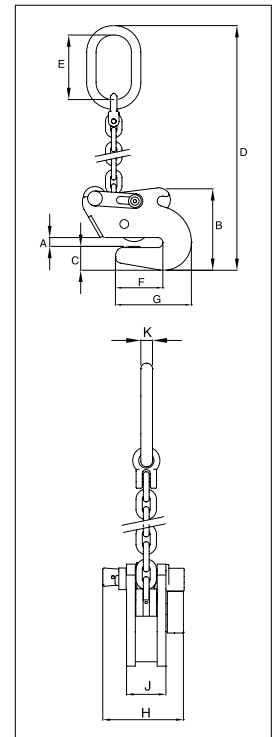

Model IPSTARTEC11

Model	Working Load Limit (t)*	Stock No.	Weight Each (lb)	Dimensions (in)										Maintenance Kit Stock No.
				Jaw A	B	C	D	E	F	G	H	J	K	
IPSTARTEC11	1.5	2701812	14.6	0.25 - 0.50	5.51	1.54	22.64	4.33	3.19	5.08	4.96	2.13	0.63	2715494
IPSTARTEC11	2.5	2701822	32.0	0.25 - 0.75	8.27	2.17	28.54	5.31	4.53	7.17	5.51	2.91	0.71	2715495

*Design Factor based on EN 13155 and ASME B30.20.

