



IPSC10



**Suitable for use in positioning & turning steel plates and sections. Not to be used as a lifting clamp.**



- Available in capacities of 1.5 and 3 metric tons.
- Jaw openings available: 0" to 2.38".
- Suitable for steel with a surface hardness up to 30 Rc.
- Forged alloy steel body for strength and smaller size. Forged alloy components, where required.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Crosby IP logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body. User manual with test certificate is included with each clamp.
- Manufactured by an ISO 9001 facility.
- Temperature range -40 °F (-40 °C) to +212 °F (+100 °C)



**Model IPSC10**

Model	Working Load Limit (t)*	Stock No.	Weight Each (lb)	Dimensions (in)										Maintenance Kit Stock No.
				Jaw A	B	C	D	E	F	G	H	J	K	
IPSC10	1.5	2703857	10.1	0 - 1.57	3.58	5.63	9.88	1.73	6.14	1.97	1.77	0.63	2.56	2715492
IPSC10	3	2703858	18.5	0 - 2.38	4.29	6.89	12.20	2.01	7.87	2.44	2.17	0.75	3.27	2715493

\*Design Factor based on EN 13155 and ASME B30.20.

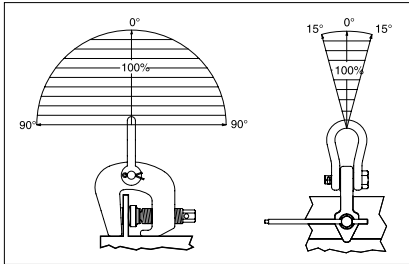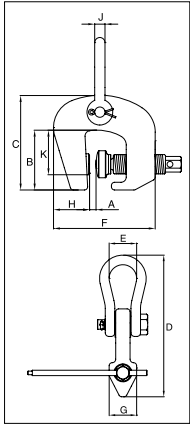


IPBG



**The Crosby IP Barrier Grab provides a fast and efficient method for handling road barriers.**

- Hands-free operation.
- Welded alloy steel construction for strength and smaller size.
- Comes equipped with polyurethane pads. (Replacement kits are available.)
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Crosby IP logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body. User manual with test certificate is included with each clamp.
- Temperature range -4 °F (-20 °C) to +158 °F (+70 °C)

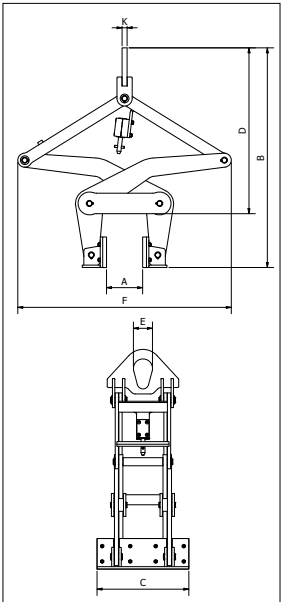

**Model IPBG**

Model	WLL (t)*	Stock No.	Weight Each (lb)	Dimensions (in)								Maintenance Kit Stock No.
				Jaw A	B	C	D	E	F	K		
IPBG	4	2704018	345	6 - 12	45.3 - 33.9	18.0	34.7 - 23.5	3.74	40.9 - 44.4	1.00		2729615

\*Design factor based on EN13155 and ASME B30.20.