


IPBUUZ



For Lifting, Transferring and Placing Bulb Profiles onto Ship's Hulls Perpendicularly.

- Available in capacities of .75 through 3.75 metric tons (higher Working Load Limits are available upon request).
- Jaw openings available: HP 4.75" to HP 17".
- Welded alloy steel body for strength and smaller size. Forged alloy components, where required.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Crosby IP logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body. User manual with test certificate is included with each clamp.
- Minimum WLL of 10% of maximum WLL.
- Maintenance and repair kits are available.
- Temperature range -40 °F (-40 °C) to +212 °F (+100 °C)

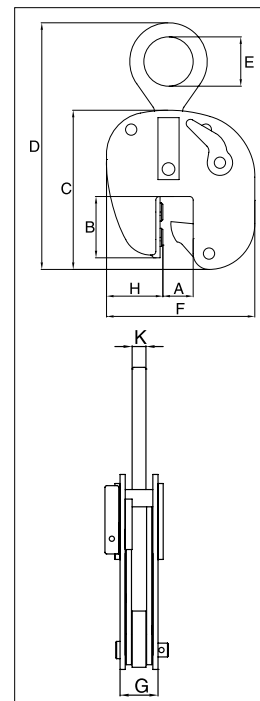

Model IPBUUZ: with Universal Hoisting Eye


Model IPBUZ: with Fixed Hoisting Eye



Model	Working Load Limit (t)*	Stock No.	Weight Each (lb)	Dimensions (in)									Maintenance Kit Stock No
				Profile A †	B	C	D	E	F	G	H	K	
IPBUUZ	0.75	2705601	16.3	HP 4.75 - 7.88	3.35	8.90	15.35	2.76	8.27	2.40	2.76	0.63	2715480
With fixed hoisting eye													
IPBUZ	0.75	2705600	13.7	HP 4.75 - 7.88	3.35	8.90	15.35	2.76	8.27	2.40	2.76	0.63	2715480
IPBUZ	1.5	2705701	33.1	HP 8.63 - 17.00	7.72	15.63	22.36	2.76	10.08	2.72	1.89	0.63	2715481
IPBUZ	3.75	2705702	64.4	HP 8.63 - 17.00	9.37	17.24	22.24	3.15	13.98	2.52	3.94	0.79	2715482

*Design Factor based on EN 13155 and ASME B30.20. †Profile A is the type of Holland Bulb (HP) style and size material.

IPBUZ

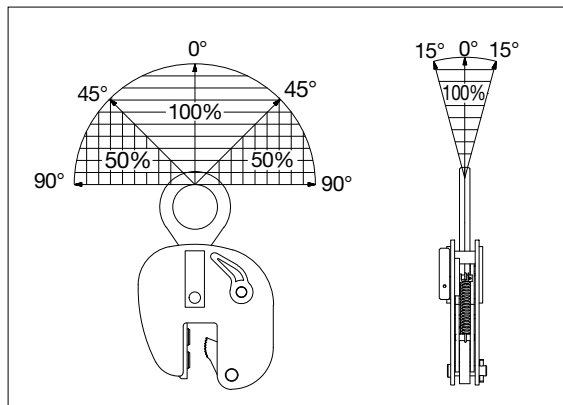

IPBUUZ

