

IPNM10N



For use in almost all sectors of industry where, during the lift or transfer, no damage to the material is permitted.

- Available in capacities of .5 , 1 and 2 metric tons (higher Working Load Limits are available upon request).
- Wide variety of jaw openings available: 0 to 40mm.
- Welded alloy steel body for strength and smaller size. Forged alloy components, where required.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Crosby IP logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body. User manual with test certificate is included with each clamp.
- Full 180° turning range for material transfer, turning or moving.
- Lock open, lock closed ability with latch for pretension on material and then release of material.
- Material must be clean and dry.
- There is no minimum WLL required.
- Maintenance replacement kits are available.
- Temperature range -20° C (-4° F) to 70° C (158° F)
- Optional with brake pad lining for temperature range -40° C (-40° F) to +200° C (+392° F)
- Special jaw openings or curved jaws upon request.

IPNM10P






Model IPNM10



Model	Working Load Limit (t)*	Stock No.	Weight Each (kg)	Dimensions (mm)									Maintenance Kit Stock No.
				Jaw A	B	C	D	E	F	G	H	K	
IPNM10N	0.5	2703811	2.7	0 - 10	84	159	235	40	128	60	42	11	2715414
IPNM10N	1	2703738	4.4	0 - 20	97	209	278	40	184	80	56	11	2715423
IPNM10	2	2703442	14.5	0 - 40	153	258	396	70	296	100	161	16	2729084
With protection cap													
IPNM10P	0.5	2703278	2.8	0 - 10	82	157	221	40	145	68	48	11	2729440
IPNM10P	1	2703279	4.5	0 - 20	97	195	276	40	205	82	66	11	2715180
With larger jaw opening													
IPNM10NJ	1	2703814	4.7	20 - 37	97	220	321	40	200	80	56	11	2715468
IPNM10NJ1	1	2703819	5.5	0 - 25	97	238	351	40	213	80	63	11	2729037

* Design Factor based on EN 13155 and ASME B30.20.

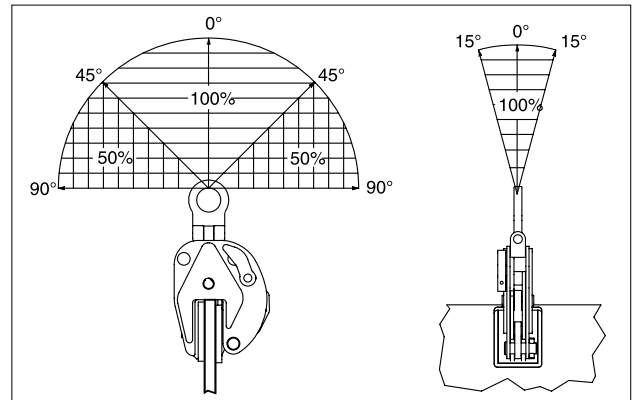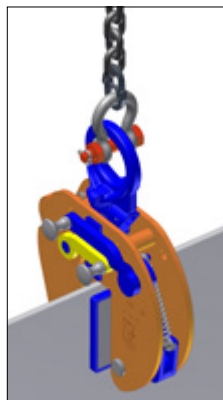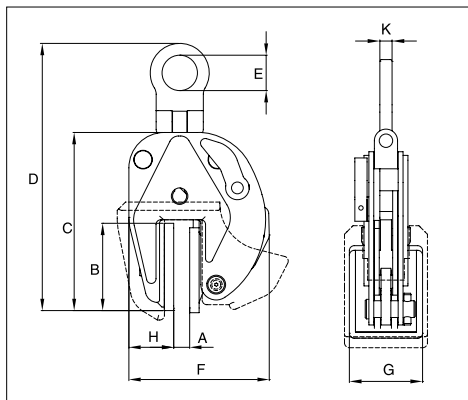

12