


IPOHZ



For Horizontal Lifting and Transfer

- Available in capacities of .75 through 12 metric tons (higher Working Load Limits are available upon request).
- Wide variety of jaw openings available: 0 to 60mm.
- Welded alloy steel body for strength and smaller size. Forged alloy, components where required.
- Equipped with handle for easy placement.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Crosby IP logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body. User manual with test certificate is included with each clamp.
- Maintenance and repair kits are available.
- Temperature range -40 °C (-40 °F) to +100 °C (+212 °F)

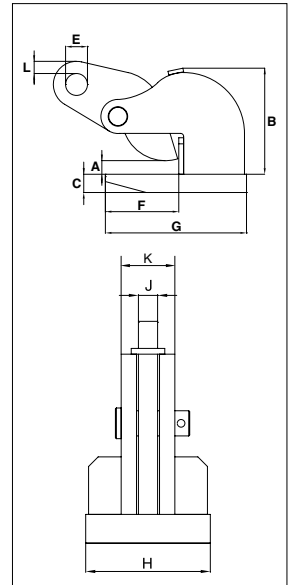

IPOHZ Horizontal Lifting Clamp



Model	Working Load Limit (Per Pair) (t)*	Stock No.	Weight Each (kg)	Dimensions (mm)									
				Jaw A	B	C	E	F	G	H	J	K	L
IPOHZ	0.75	2705401	3.0	0 - 30	94	16	16	70	118	81	12	31	12
IPOHZ	1.5	2705402	5.5	0 - 45	133	16	22	125	192	100	16	36	12
IPOHZ	3	2705403	8.0	0 - 45	137	20	26	125	200	120	20	48	10
IPOHZ	4.5	2705404	9.5	0 - 45	138	25	30	126	220	120	20	50	10
IPOHZ	6	2705405	15.5	0 - 60	171	30	36	135	235	130	20	56	20
IPOHZ	9	2705406	25.0	0 - 60	211	30	43	166	276	160	25	62	20
IPOHZ	12	2705407	29.0	0 - 60	217	40	47	168	294	190	25	62	19

*Design Factor based on EN 13155 and ASME B30.20.

