




### S-247 Double Clevis Link

- All pins alloy steel - Quenched & Tempered.
- Body is forged and heat treated carbon steel.
- Designed for linking all popular sizes of Grade 3 and Grade 4 chain to rings, end links, eye hooks, pad eyes, tractor eye bolts, etc.
- Features quick and easy assembly.

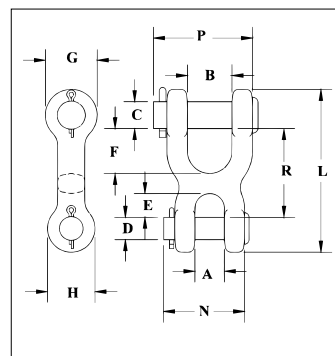

### S-247 Double Clevis Link

| Chain Size<br>(in) | Stock No. | Working<br>Load Limit<br>(lb) | Weight Each<br>(lb) | Dimensions<br>(in) |      |     |     |     |      |      |      |      |      |      |      |
|--------------------|-----------|-------------------------------|---------------------|--------------------|------|-----|-----|-----|------|------|------|------|------|------|------|
|                    |           |                               |                     | A                  | B    | C   | D   | E   | F    | G    | H    | L    | N    | P    | R    |
| 1/4                | 1013021   | 2600                          | .38                 | .50                | .75  | .50 | .31 | .38 | .75  | 1.00 | .81  | 2.81 | 1.38 | 1.66 | 1.50 |
| 5/16-3/8           | 1013049   | 5400                          | .81                 | .56                | 1.00 | .63 | .44 | .47 | 1.00 | 1.19 | 1.00 | 3.53 | 1.75 | 2.25 | 1.91 |
| 7/16               | 1013067   | 7200                          | 1.25                | .69                | 1.13 | .69 | .56 | .59 | 1.09 | 1.31 | 1.19 | 4.06 | 2.00 | 2.50 | 2.19 |
| 1/2                | 1013085   | 9200                          | 1.56                | .81                | 1.25 | .75 | .63 | .68 | 1.25 | 1.44 | 1.31 | 4.53 | 2.25 | 2.75 | 2.47 |


\* Ultimate Load is 4 times the Working Load Limit.

Not Suitable for use with Grade 80 or Grade 100 chain and chain slings used in overhead lifting.



### S-249 Twin Clevis Link

- Available in three popular sizes.
- Body is forged and heat treated carbon steel.
- All pins alloy steel - Quenched & Tempered.
- Features quick and easy assembly.
- Twin Clevis design provides a variety of uses and can be used with Grade 3, Grade 4 and Grade 7 chain.

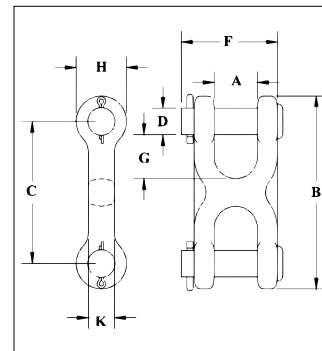

### S-249 Twin Clevis Link

| Chain Size<br>(in) | Stock No. | Working<br>Load Limit<br>(lb) | Weight Each<br>(lb) | Dimensions<br>(in) |      |      |     |      |     |      |     |
|--------------------|-----------|-------------------------------|---------------------|--------------------|------|------|-----|------|-----|------|-----|
|                    |           |                               |                     | A                  | B    | C    | D   | F    | G   | H    | K   |
| 1/4-5/16           | 1012861   | 4700                          | .31                 | .47                | 2.50 | 1.56 | .38 | 1.31 | .43 | .94  | .50 |
| 3/8                | 1012889   | 6600                          | .44                 | .53                | 2.81 | 1.81 | .44 | 1.53 | .50 | 1.00 | .56 |
| 7/16-1/2           | 1012905   | 11300                         | .98                 | .65                | 3.62 | 2.31 | .56 | 1.91 | .63 | 1.31 | .81 |

4:1 Design Factor.

Not Suitable for use with Grade 80 or Grade 100 chain and chain slings used in overhead lifting.