

UB-500 Series Top Swiveling Overhaul Balls



With
S320
Eye Hook



With
S1316 A
SHUR-LOC®
Eye Hook



Both styles available with
optional **McKissick®**
Wedge Socket Assembly
or **S-422 TERMINATOR**
Wedge Socket



UWO 422T
TERMINATOR
Wedge Only

- Sizes 4 short Tons through 30 short Tons are available with Crosby's S1316A positive-locking SHUR-LOC® hook, which may be used for lifting personnel. Meets the intent of OSHA Rule 1926.1431(g)(1)(i)(A) and 1926.1501(g)(4)(iv)(B).
- Design Factor 4:1
- The top swivel design on the UB-500 assures the ball remains stationary if the wireline spins.
- The swivel incorporates a sealed roller thrust bearing together with a grease fitting for easy lubrication.
- Each ball can be equipped with the new McKissick® US-422T Wedge Socket which can be easily adjusted to fit various sizes of wireline by changing the wedge (ensure that correct wedge is used for selected wireline size).
- All hooks used on UB-500 Overhaul Balls (S320, S320N & S1316A) are forged from alloy steel. The S320 and S320N hooks come complete with latches.
- The S320 hook (PL latch) and the S320N hook (S4320 latch), with the proper latch attached, may be used for personnel lifting when secured with proper device (bolt, nut and pin for the PL latch; Cotter pin for the S4320 latch). Meets the intent of OSHA Rule 1926.1431(g)(1)(i)(A) and 1926.1501(g)(4)(iv)(B).


Overhaul Ball Assembly

Optional US-422T Wedge Sockets

McKissick® UB-500 Model No.	UB-500 "E" Eye Hook Stock No.	UB-500 "S" SHUR-LOC® Stock No.	Working Load Limit (short tons)	Weight Each (lb)	Wireline Size (in)	Model No.	Wedge Socket Assy. Stock No.	Weight Each (lb)	Wedge Only Stock No.	Weight Each (lb)
MB4T35E	1036000*	1036005	4	58	3/8	US4T	1044300	4.6	1047310	0.7
MB4T85E	1036009*	1036018	4	102	7/16	US4T	1044309	4.6	1047301	1.0
MB4T150E	1036027*	1036032	4	162	1/2	US4T	1044318	4.6	1047329	1.0
MB4T200E	1036036*	1036041	4	201	1/2	US5T	1044327	8.5	1047338	2.0
MB7T85E	1036045*	1036050	7	109	9/16	US5T	1044336	8.5	1047347	1.8
MB7T150E	1036054*	1036063	7	170	5/8	US5T	1044345	8.5	1047356	1.8
MB7T200E	1036072*	1036077	7	210	5/8	US6T	1044354	9.4	1047365	3.0
MB7T285E	1036081*	1036086	7	321	3/4	US6T	1044363	9.4	1047374	2.5
MB10T150E	1036090*	1036095	10	216						
MB10T200E	1036099*	1036108	10	260						
MB10T285E	1036117*	1036122	10	365	5/8	US6T	1044354	9.4	1047365	3.0
MB10T350E	1036126*	1036131	10	403	3/4	US6T	1044363	9.4	1047374	2.5
MB10T650E	1036135*	1036140	10	718	7/8	US8T	1044404	20.8	1047425	5.5
MB12T150E	1036144*	1036520	12	216	1	US8T	1044417	20.8	1047431	6.1
MB12T200E	1036153*	1036529	12	258	1-1/8	US10T	1044426	46.5	1047440	9.7
MB12T285E	1036171*	1036538	12	365	1-1/4	US10T	1044435	46.5	1047459	10.4
MB12T350E	1036180*	1036547	12	403						
MB12T650E	1036189*	1036556	12	718						
MB15T200E	1036198*	1036565	15	298						
MB15T350E	1036207*	1036574	15	456						
MB15T650E	1036216*	1036583	15	753						
MB15T1150E	1036225*	1036592	15	1311						
MB20T200E	1036234*	1036611	20	298	5/8	US8AT	1044372	17.5	1047383	3.2
MB20T350E	1036243*	1036620	20	456	3/4	US8AT	1044381	17.5	1047392	3.4
MB20T650E	1036252*	1036629	20	753	7/8	US8T	1044404	20.8	1047425	5.5
MB20T1150E	1036261*	1036638	20	1311	1	US8T	1044417	20.8	1047431	6.1
MB25T350E	1036270	1036647	25	533	1-1/8	US10T	1044426	46.5	1047440	9.7
MB25T650E	1036279	1036656	25	865	1-1/4	US10T	1044435	46.5	1047459	10.4
MB25T1150E	1036288	1036665	25	1421						
MB30T650E	1036297	1036674	30	865						
MB30T1150E	1036306	1036683	30	1421						

4:1 Design Factor. * Utilizes Crosby "N" style hooks with integrated latch. Replacement latch kit is S-4320. PL latch and S-4055 latch will not fit. Standard Crosby S-5 Thrust style swivels can not be used with UB-500 Overhaul Balls. For replacement swivels, contact Crosby Customer Service.


UB-500 TOP SWIVEL OVERHAUL BALLS

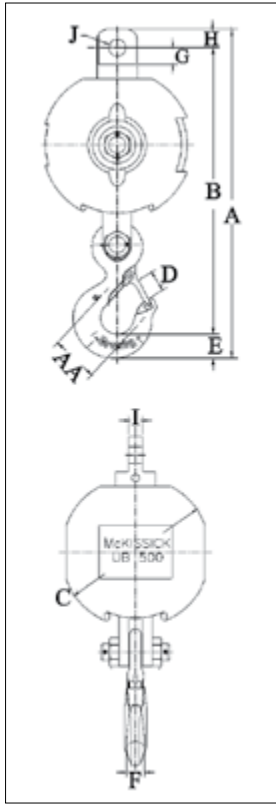

UB-500E Top Swivel Overhaul Balls with 320 Eye Hooks

Model No.	UB-500 "E" Stock No.*	Dimensions (in)										
		A	B	C	D	E	F	G	H	I	J	AA
MB4T35E	1036000*	20.09	17.27	7.50	1.36	1.44	1.12	1.88	1.38	.88	1.31	2.5
MB4T85E	1036009*	20.98	18.16	9.25	1.36	1.44	1.12	1.88	1.38	.88	1.31	2.5
MB4T150E	1036027*	21.98	19.16	11.25	1.36	1.44	1.12	1.88	1.38	.88	1.31	2.5
MB4T200E	1036036*	22.35	19.53	12.50	1.36	1.44	1.12	1.88	1.38	.88	1.31	2.5
MB7T85E	1036045*	23.18	20.36	9.25	1.61	1.81	1.38	1.88	1.38	.88	1.31	3.0
MB7T150E	1036054*	24.56	21.36	11.25	1.61	1.81	1.38	1.88	1.38	.88	1.31	3.0
MB7T200E	1036072*	24.89	21.71	12.50	1.61	1.81	1.38	1.88	1.38	.88	1.31	3.0
MB7T285E	1036081*	25.86	22.67	13.88	1.61	1.81	1.38	1.88	1.38	.88	1.31	3.0
MB10T150E	1036090*	31.44	27.19	11.25	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB10T200E	1036099*	31.81	27.56	12.50	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB10T285E	1036117*	32.75	28.50	13.88	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB10T350E	1036126*	33.31	29.06	15.00	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB10T650E	1036135*	34.79	30.54	17.94	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB12T150E	1036144*	31.44	27.19	11.25	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB12T200E	1036153*	31.81	27.56	12.50	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB12T285E	1036171*	32.75	28.50	13.88	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB12T350E	1036180*	33.31	29.06	15.00	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB12T650E	1036189*	35.79	30.54	17.94	2.08	2.25	1.62	2.75	2.00	1.25	1.78	4.0
MB15T200E	1036198*	37.59	32.59	12.50	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB15T350E	1036207*	38.81	33.81	15.00	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB15T650E	1036216*	40.22	35.22	17.94	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB15T1150E	1036225*	42.22	37.22	21.62	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB20T200E	1036234*	37.59	32.59	12.50	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB20T350E	1036243*	38.81	33.81	15.00	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB20T650E	1036252*	40.22	35.22	17.94	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB20T1150E	1036261*	42.22	37.22	21.62	3.02	3.00	2.38	2.38	2.00	1.25	1.78	5.0
MB25T350E	1036270	47.18	40.18	15.00	3.00	3.62	3.00	3.31	2.75	1.75	1.78	6.5
MB25T650E	1036279	49.12	42.75	17.94	3.00	3.62	3.00	3.31	2.75	1.75	1.78	6.5
MB25T1150E	1036288	51.06	44.69	21.62	3.00	3.62	3.00	3.31	2.75	1.75	1.78	6.5
MB30T650E	1036297	49.12	42.75	17.94	3.00	3.62	3.00	3.31	2.75	1.75	1.78	6.5
MB30T1150E	1036306	51.06	44.69	21.62	3.00	3.62	3.00	3.31	2.75	1.75	1.78	6.5

4:1 Design Factor. *4 short Ton through 20 short Ton models use Crosby "N" style hooks with integrated latch. All sizes are RFID EQUIPPED.

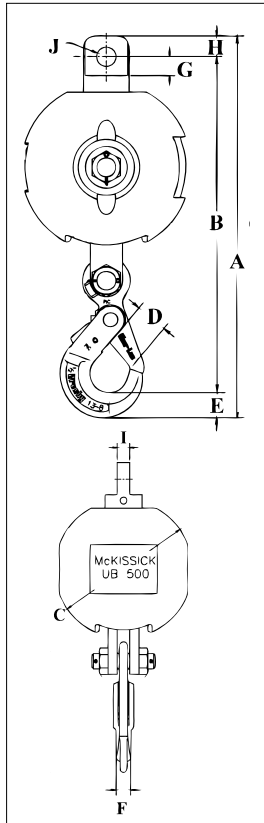

UB-500S Top Swivel Overhaul Balls with SHUR-LOC® Hooks

Model No.	UB-500 "S" Stock No.	Dimensions (in)									
		A	B	C	D	E	F	G	H	I	J
MB4T35S	1036005	20.66	18.18	7.50	1.83	1.15	.94	1.88	1.38	.88	1.31
MB4T85S	1036018	21.55	19.05	9.25	1.83	1.15	.94	1.88	1.38	.88	1.31
MB4T150S	1036032	22.55	20.05	11.25	1.83	1.15	.94	1.88	1.38	.88	1.31
MB4T200S	1036041	22.92	20.42	12.50	1.83	1.15	.94	1.88	1.38	.88	1.31
MB7T85S	1036050	23.90	21.30	9.25	2.11	1.66	1.16	1.88	1.38	.88	1.31
MB7T150S	1036063	25.28	22.30	11.25	2.11	1.66	1.16	1.88	1.38	.88	1.31
MB7T200S	1036077	25.61	22.65	12.50	2.11	1.66	1.16	1.88	1.38	.88	1.31
MB7T285S	1036086	26.58	23.61	13.88	2.11	1.66	1.16	1.88	1.38	.88	1.31
MB10T150S	1036095	31.24	27.19	11.25	2.49	2.06	1.50	2.75	2.00	1.25	1.78
MB10T200S	1036108	31.61	27.56	12.50	2.49	2.06	1.50	2.75	2.00	1.25	1.78
MB10T285S	1036122	32.55	28.50	13.88	2.49	2.06	1.50	2.75	2.00	1.25	1.78
MB10T350S	1036131	33.11	29.06	15.00	2.49	2.06	1.50	2.75	2.00	1.25	1.78
MB10T650S	1036140	34.59	30.54	17.94	2.49	2.06	1.50	2.75	2.00	1.25	1.78