

UB-500 Series Top Swiveling Overhaul Balls



With
S320
Eye Hook



With
S1316 A
SHUR-LOC®
Eye Hook



Both styles available with
optional **McKissick®**
Wedge Socket Assembly
or **S-422 TERMINATOR**
Wedge Socket



UWO 422T
TERMINATOR
Wedge Only

- Sizes 3.6 tonnes through 27 tonnes are available with Crosby's S1316A positive-locking SHUR-LOC® hook, which may be used for lifting personnel. Meets the intent of OSHA Rule 1926.1431(g)(1)(i)(A) and 1926.1501(g)(4)(iv)(B).
- Design Factor 4:1
- The top swivel design on the UB-500 assures the ball remains stationary if the wireline spins.
- The swivel incorporates a sealed roller thrust bearing together with a grease fitting for easy lubrication.
- Each ball can be equipped with the new McKissick® US-422T Wedge Socket which can be easily adjusted to fit various sizes of wireline by changing the wedge (ensure that correct wedge is used for selected wireline size).
- All hooks used on UB-500 Overhaul Balls (S320, S320N & S1316A) are forged from alloy steel. The S320 and S320N hooks come complete with latches.
- The S320 hook (PL latch) and the S320N hook (S4320 latch), with the proper latch attached, may be used for personnel lifting when secured with proper device (bolt, nut and pin for the PL latch; Cotter pin for the S4320 latch). Meets the intent of OSHA Rule 1926.1431(g)(1)(i)(A) and 1926.1501(g)(4)(iv)(B).


Overhaul Ball Assembly

Optional US-422T Wedge Sockets

McKissick® UB-500 Model No.	UB-500 "E" Eye Hook Stock No.	UB-500 "S" SHUR-LOC® Stock No.	Working Load Limit (t)	Weight Each (kg)	Wireline Size (mm)	Model No.	Wedge Socket Assy. Stock No.	Weight Each (kg)	Wedge Only Stock No.	Weight Each (kg)
MB4T35E	1036000*	1036005	3.6	26.3	10	US4T	1044300	2.09	1047310	2.09
MB4T85E	1036009*	1036018	3.6	46.3	11	US4T	1044309	2.09	1047301	2.09
MB4T150E	1036027*	1036032	3.6	73.5	13	US4T	1044318	2.09	1047329	2.09
MB4T200E	1036036*	1036041	3.6	91.2	13	US5T	1044327	3.86	1047338	3.86
MB7T85E	1036045*	1036050	6.3	49.4	14	US5T	1044336	3.86	1047347	3.86
MB7T150E	1036054*	1036063	6.3	77.1	16	US5T	1044345	3.86	1047356	3.86
MB7T200E	1036072*	1036077	6.3	95.3	16	US6T	1044354	4.26	1047365	4.26
MB7T285E	1036081*	1036086	6.3	146	19	US6T	1044363	4.26	1047374	4.26
MB10T150E	1036090*	1036095	9.0	98						
MB10T200E	1036099*	1036108	9.0	118						
MB10T285E	1036117*	1036122	9.0	166	16	US6T	1044354	4.26	1047365	4.26
MB10T350E	1036126*	1036131	9.0	183	19	US6T	1044363	4.26	1047374	4.26
MB10T650E	1036135*	1036140	9.0	326	22	US8T	1044404	14.3	1047425	14.3
MB12T150E	1036144*	1036520	10.8	98	26	US8T	1044417	14.7	1047431	14.7
MB12T200E	1036153*	1036529	10.8	117	28	US10T	1044426	25.1	1047440	25.1
MB12T285E	1036171*	1036538	10.8	166	32	US10T	1044435	26.3	1047459	26.3
MB12T350E	1036180*	1036547	10.8	183						
MB12T650E	1036189*	1036556	10.8	326						
MB15T200E	1036198*	1036565	13.5	135						
MB15T350E	1036207*	1036574	13.5	207						
MB15T650E	1036216*	1036583	13.5	342						
MB15T1150E	1036225*	1036592	13.5	595						
MB20T200E	1036234*	1036611	18.0	135	16	US8AT	1044372	9.0	1047383	9.0
MB20T350E	1036243*	1036620	18.0	207	19	US8AT	1044381	9.3	1047392	9.3
MB20T650E	1036252*	1036629	18.0	342	22	US8T	1044404	14.3	1047425	14.3
MB20T1150E	1036261*	1036638	18.0	595	26	US8T	1044417	14.7	1047431	14.7
MB25T350E	1036270	1036647	22.5	242	28	US10T	1044426	25.1	1047440	25.1
MB25T650E	1036279	1036656	22.5	392	32	US10T	1044435	26.3	1047459	26.3
MB25T1150E	1036288	1036665	22.5	645						
MB30T650E	1036297	1036674	27.0	392						
MB30T1150E	1036306	1036683	27.0	645						

4:1 Design Factor. * Utilizes Crosby "N" style hooks with integrated latch. Replacement latch kit is S-4320. PL latch and S-4055 latch will not fit. Standard Crosby S-5 Thrust style swivels can not be used with UB-500 Overhaul Balls. For replacement swivels, contact Crosby Customer Service.


UB-500 TOP SWIVEL OVERHAUL BALLS

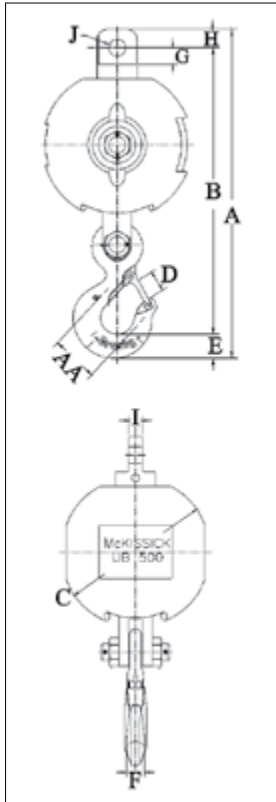

UB-500E Top Swivel Overhaul Balls with 320 Eye Hooks

Model No.	UB-500 "E" Stock No.*	Dimensions (mm)										
		A	B	C	D	E	F	G	H	I	J	AA
MB4T35E	1036000*	510	439	191	34.5	36.6	28.4	47.8	35.1	22.4	33.3	63.5
MB4T85E	1036009*	533	461	235	34.5	36.6	28.4	47.8	35.1	22.4	33.3	63.5
MB4T150E	1036027*	558	487	286	34.5	36.6	28.4	47.8	35.1	22.4	33.3	63.5
MB4T200E	1036036*	568	496	318	34.5	36.6	28.4	47.8	35.1	22.4	33.3	63.5
MB7T85E	1036045*	589	517	235	40.9	46.0	35.1	47.8	35.1	22.4	33.3	76.0
MB7T150E	1036054*	624	543	286	40.9	46.0	35.1	47.8	35.1	22.4	33.3	76.0
MB7T200E	1036072*	632	551	318	40.9	46.0	35.1	47.8	35.1	22.4	33.3	76.0
MB7T285E	1036081*	657	576	353	40.9	46.0	35.1	47.8	35.1	22.4	33.3	76.0
MB10T150E	1036090*	799	691	286	53.0	57.0	41.1	70.0	51.0	22.4	45.2	102
MB10T200E	1036099*	808	700	318	53.0	57.0	41.1	70.0	51.0	31.8	45.2	102
MB10T285E	1036117*	832	724	353	53.0	57.0	41.1	70.0	51.0	31.8	45.2	102
MB10T350E	1036126*	846	738	381	53.0	57.0	41.1	70.0	51.0	31.8	45.2	102
MB10T650E	1036135*	884	776	456	53.0	57.0	41.1	70.0	51.0	31.8	45.2	102
MB12T150E	1036144*	799	691	286	53.0	57.0	41.1	70.0	51.0	31.8	45.2	102
MB12T200E	1036153*	808	700	318	53.0	57.0	41.1	70.0	51.0	31.8	45.2	102
MB12T285E	1036171*	832	724	353	53.0	57.0	41.1	70.0	51.0	31.8	45.2	102
MB12T350E	1036180*	846	738	381	53.0	57.0	41.1	70.0	51.0	31.8	45.2	102
MB12T650E	1036189*	909	776	456	53.0	57.0	41.1	70.0	51.0	31.8	45.2	102
MB15T200E	1036198*	955	828	318	76.5	76.0	60.5	60.5	51.0	31.8	45.2	127
MB15T350E	1036207*	986	859	381	76.5	76.0	60.5	60.5	51.0	31.8	45.2	127
MB15T650E	1036216*	1022	895	456	76.5	76.0	60.5	60.5	51.0	31.8	45.2	127
MB15T1150E	1036225*	1072	945	549	76.5	76.0	60.5	60.5	51.0	31.8	45.2	127
MB20T200E	1036234*	955	828	318	76.5	76.0	60.5	60.5	51.0	31.8	45.2	127
MB20T350E	1036243*	986	859	381	76.5	76.0	60.5	60.5	51.0	31.8	45.2	127
MB20T650E	1036252*	1022	895	456	76.5	76.0	60.5	60.5	51.0	31.8	45.2	127
MB20T1150E	1036261*	1072	945	549	76.5	76.0	60.5	60.5	51.0	31.8	45.2	127
MB25T350E	1036270	1198	1021	381	76.0	92.0	76.0	84.0	70.0	44.5	45.2	165
MB25T650E	1036279	1248	1086	456	76.0	92.0	76.0	84.0	70.0	44.5	45.2	165
MB25T1150E	1036288	1297	1135	549	76.0	92.0	76.0	84.0	70.0	44.5	45.2	165
MB30T650E	1036297	1248	1086	456	76.0	92.0	76.0	84.0	70.0	44.5	45.2	165
MB30T1150E	1036306	1297	1135	549	76.0	92.0	76.0	84.0	70.0	44.5	45.2	165

4:1 Design Factor. *3.6 short Ton through 27 short Ton models use Crosby "N" style hooks with integrated latch.

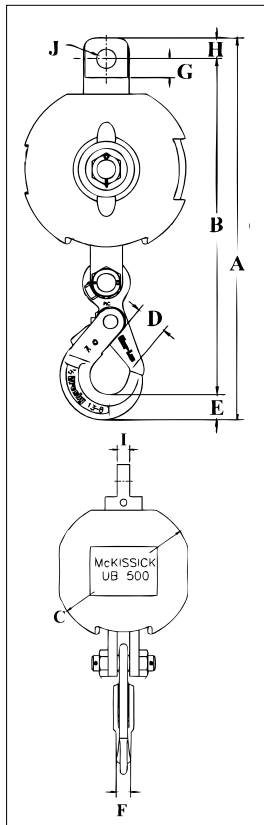

UB-500S Top Swivel Overhaul Balls with SHUR-LOC® Hooks

Model No.	UB-500 "S" Stock No.	Dimensions (mm)										
		A	B	C	D	E	F	G	H	I	J	
MB4T35S	1036005	525	462	191	46.5	29.2	23.9	47.8	35.1	22.4	33.3	
MB4T85S	1036018	547	484	235	46.5	29.2	23.9	47.8	35.1	22.4	33.3	
MB4T150S	1036032	573	509	286	46.5	29.2	23.9	47.8	35.1	22.4	33.3	
MB4T200S	1036041	582	519	318	46.5	29.2	23.9	47.8	35.1	22.4	33.3	
MB7T85S	1036050	607	541	235	53.5	42.2	29.5	47.8	35.1	22.4	33.3	
MB7T150S	1036063	642	566	286	53.5	42.2	29.5	47.8	35.1	22.4	33.3	
MB7T200S	1036077	650	575	318	53.5	42.2	29.5	47.8	35.1	22.4	33.3	
MB7T285S	1036086	675	600	353	53.5	42.2	29.5	47.8	35.1	22.4	33.3	
MB10T150S	1036095	793	691	286	63.0	52.5	38.1	70.0	51.0	31.8	45.2	
MB10T200S	1036108	803	700	318	63.0	52.5	38.1	70.0	51.0	31.8	45.2	
MB10T285S	1036122	827	724	353	63.0	52.5	38.1	70.0	51.0	31.8	45.2	
MB10T350S	1036131	841	738	381	63.0	52.5	38.1	70.0	51.0	31.8	45.2	
MB10T650S	1036140	879	776	456	63.0	52.5	38.1	70.0	51.0	31.8	45.2	