


Swivel Safety Hook BKL

Safety hook with swivel for improved positioning of the hook before the load is lifted (360° rotation).

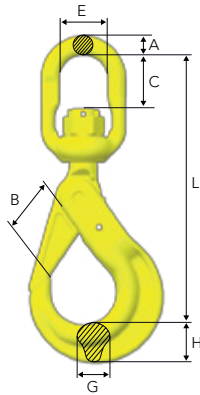


Stock No.	Code	WLL (t)	Dimensions (mm)							Weight (kg)
			L	B	C	E	A	G	H	
Z101114	BKL-6-10	1.5	149	29	23	33	11	15	21	0.7
Z101104	BKL-7/8-10	2.6	183	37	27	38	12	17	26	1.2
Z101028	BKL-10-10	4.0	218	45	37	44	15	21	31	2.0
Z101036	BKL-13-10	6.8	282	55	49	48	19	30	40	4.0
Z101044	BKL-16-10	10.3	341	62	65	61	25	37	50	7.2
Z101093	BKL-18/20-10	16.0	368	68	70	72	31	44	62	11.4

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M.

4:1 Design Factor

Swivel Safety Hook BKLK

Safety hook with ball-bearing for 360° rotation under full WLL.

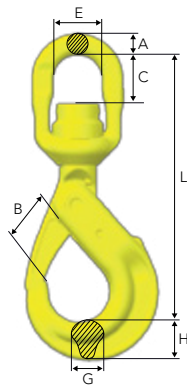

Stock No.	Code	WLL (t)	Dimensions (mm)							Weight (kg)
			L	B	C	E	A	G	H	
Z101116	BKLK-6-10	1.5	149	29	24	33	11	15	21	0.7
Z101106	BKLK-7/8-10	2.6	183	37	27	38	12	17	26	1.2
Z101030	BKLK-10-10	4.0	218	45	35	44	15	21	31	2.0
Z101038	BKLK-13-10	6.8	280	55	45	48	19	30	40	4.0
Z101046	BKLK-16-10	10.3	339	62	62	61	25	37	50	7.3
Z101095	BKLK-18/20-10	16.0	368	68	60	72	31	44	62	11.5
Z101294	BKLK-22-10 OS	20.0	436	79	80	80	35	50	62	16.8
Z101295	BKLK-26-10 OS	27.3	486	100	110	102	45	54	68	26.0


Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M.

For larger sizes, see Classic Grade 8.

4:1 Design Factor

Swivel Safety Hook with Griplatch LBK

Safety hook with griplatch and swivel for improved positioning of the hook before the load is lifted (360° rotation).

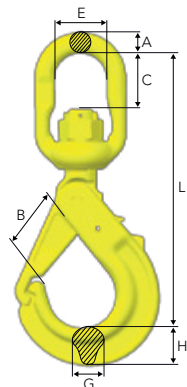


Stock No.	Code	WLL (t)	Dimensions (mm)							Weight (kg)
			L	B	C	E	A	G	H	
Z100978	LBK-7/8-10	2.6	177	37	27	38	12	20	22	1.1
Z100960	LBK-10-10	4.0	214	47	37	44	15	22	29	1.8
Z100993	LBK-13-10	6.8	262	53	45	48	19	29	38	3.5
Z100995	LBK-16-10	10.3	324	68	66	61	25	30	45	5.9

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M.

4:1 Design Factor

Swivel Safety Hook with Griplatch LKBK

Safety hook with griplatch and ball-bearing for 360° rotation under full WLL.

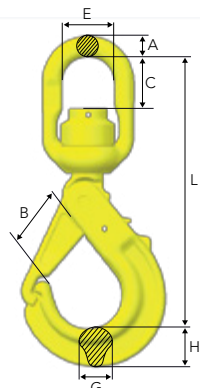

Stock No.	Code	WLL (t)	Dimensions (mm)							Weight (kg)
			L	B	C	E	A	G	H	
Z100980	LKBK-7/8-10	2.6	176	37	27	38	12	20	22	1.1
Z100962	LKBK-10-10	4.0	213	47	35	44	15	22	29	1.9
Z100997	LKBK-13-10	6.8	261	53	43	48	19	29	38	3.6
Z100999	LKBK-16-10	10.3	323	68	61	61	25	30	45	6.2

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M.

4:1 Design Factor