


Safety Hook with Griplatch OBK

Stock No.	Code	WLL (t)	Dimensions (mm)							Weight (kg)
			A	L	B	E	F	G	H	
Z100218	OBK-22-8	15.5	30	335	87	70	24	40	58	10.2

Fulfills requirements in: EN 1677:2008, ISO 8539:2009, ASTM A952/A952M and AS 3776:2015.

4:1 Design Factor




Safety Hook BK

Stock No.	Code	WLL (t)	Dimensions (mm)						Weight (kg)
			L	B	E	F	G	H	
Z101357	BK-32-8	32.8	400	120	90	30	62	86	23.8

Fulfills requirements in: EN 1677:2008, ISO 8539:2009, ASTM A952/A952M and AS 3776:2015.

4:1 Design Factor

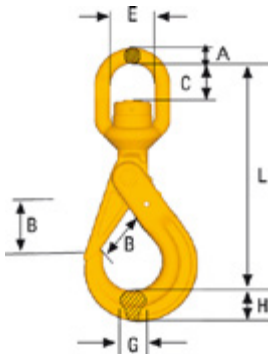


Swivel Safety Hook BCLK

Safety hook with ball-bearing for 360° rotation under full load.

Stock No.	Code	WLL (t)	Dimensions (mm)							Weight (kg)
			L	B	C	E	A	G	H	
Z101344	BCLK-32-8	32.8	533	120	110	102	45	62	86	32.3

Fulfills requirements in: EN 1677:2008, ISO 8539:2009, ASTM A952/A952M and AS 3776:2015.

4:1 Design Factor



Sling Hook EK (without latch) and EKN (with latch)

Stock No.	Code	WLL (t)	Dimensions (mm)						Weight (kg)
			L	B	E	F	G	H	
Z100720	EK-32-8	32.8	333	105	76	38	61	80	17.7
Z100725	EKN-32-8	32.8	333	93	76	38	61	80	17.9

Fulfills requirements in: EN 1677:2008, ISO 8539:2009, ASTM A952/A952M and AS 3776:2015.

4:1 Design Factor