




- Latch Kits shipped unassembled and individually packaged with instructions.
- For use only with Crosby L-1338 and L-1358 Grab Hooks.

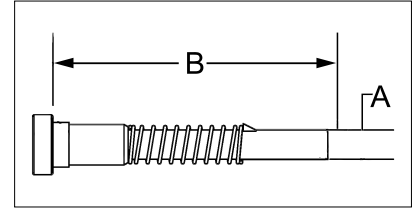

S-4338 Grab Hook Latch Kits

Hook Size		Stock No.	Weight Each (kg)	Dimensions (mm)	
(in)	(mm)			A	B
1/4	7	1048426	.01	4.7	40.4
5/16	8	1048435	.01	4.7	45.2
3/8	10	1048444	.02	6.3	57.2
1/2	13	1048453	.03	7.9	65.2


APPLICATION AND WARNING INFORMATION
SECTION 17

6

S-1317



- Forged alloy steel — Quenched & Tempered.
- Individually Proof Tested to 2-1/2 times the Working Load Limit with certification.
- Recessed trigger design is flush with the hook body, protecting the trigger from potential damage.
 - Easy to operate with enlarged thumb access.
- Positive Lock Latch is self-locking when hook is loaded.
- Eye style is designed with engineered flat to connect to S-1325 chain coupler.
- Suitable for use with Grade 100 and Grade 80 chain.
- The SHUR-LOC® hook, if properly installed and locked, can be used for personnel lifting applications and meets the intent of OSHA Rule 1926.1431(g)(1)(i)(A) and 1926.1501(g)(4)(iv)(B).
- Fatigue rated to 20,000 cycles at 1-1/2 times the Working Load Limit.

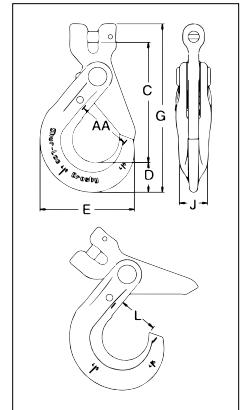

Crosby 8/10™

Fatigue Resistant

QUIC-CHECK®

QT

APPLICATION AND WARNING INFORMATION
SECTION 17

S-1317 Clevis Hook

Chain Size		Working Load Limit (t)	Stock No.	Weight Each (kg)	Dimensions (mm)							Replacement Trigger Kit Stock No.
(in)	(mm)				C	D	E	G	J	L	AA	
-	6	1.5	1028991	.35	87.4	20.1	66.0	121	16.0	29.0	38.1	6603010
1/4	7	2.0	1029000	.82	114	27.9	89.0	159	20.6	35.1	51.0	6603011
5/16	8	2.6	1029009	.82	114	27.9	89.0	159	20.6	35.1	51.0	6603011
3/8	10	4.0	1029018	1.66	140	29.7	112	192	24.1	46.5	63.5	6603012
1/2	13	6.8	1029027	3.08	173	42.4	139	242	29.5	56.4	76.2	6603013
5/8	16	10.3	1029036	5.40	209	51.8	167	295	38.1	67.3	89.0	6603014
3/4	18-20	16.0	1029071	6.80	239	56.4	197	336	51.6	89.4	-	6603015
7/8	22	20.0	1029080	12.7	283	62.2	222	392	55.9	97.3	-	6603008
1	26	27.1	1029089	22.5	319	81.5	251	468	68.1	104	-	6603017

4:1 Design Factor.