


S-314A



- Forged alloy steel - Quenched & Tempered.
- Individually Proof Tested at 2-1/2 times the Working Load Limit with certification.
- Integrated heavy duty latch.
- Meets ASTM A-952 for Grade 80 chain fittings.
- Fatigue rated to 20,000 cycles at 1-1/2 times the Working Load Limit.

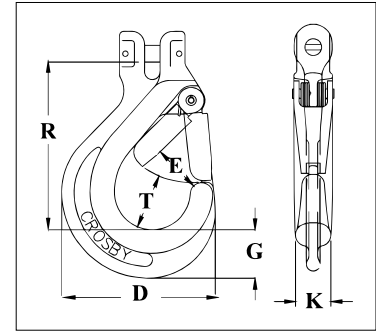

Fatigue Rated

QT

S-314A Clevis Chain Hook with Integrated Latch


Chain Size		Stock No.	Grade 8 Alloy Chain Working Load Limit (t)	Weight Each (kg)	Dimensions (mm)						Replacement Latch Stock No.
(in)	(mm)				D	E	G	K	R	T	
-	6	1225020	1.12	.32	66.0	20.6	20.0	16.0	72.3	26.0	1291332
1/4 - 5/16	7 - 8	1225021	2	.70	89.0	27.4	28.0	20.5	98.0	32.6	1291402
3/8	10	1225091	3.15	1.29	110.5	36.1	29.3	24.0	125.3	42.2	1291472
1/2	13	1225161	5.3	2.34	138.5	38.6	42.1	29.5	144.5	49.2	1291542
5/8	16	1225162	8	3.67	166.5	48.5	52.0	38.0	172.6	58.9	1291612

4:1 Design Factor.

S-315A



- Forged alloy steel - Quenched & Tempered.
- Individually Proof Tested at 2-1/2 times the Working Load Limit with certification.
- Crosby recommends grinding the WLL (which is 5:1 Design Factor) off the hook when using with Grade 80 chain.
- Integrated heavy duty latch.
- Engineered flat for use with S-1325A Coupler Link.
- Meets ASTM A-952 for Grade 80 chain fittings.
- Fatigue rated to 20,000 cycles at 1-1/2 times the Working Load Limit.



Fatigue Rated

QT

S-315A Eye Chain Hook with Integrated Latch


Chain Size		Stock No.	Grade 8 Alloy Chain Working Load Limit (t)	Working Load Limit for Wire Rope (short Tons)	Weight Each (kg)	Dimensions (mm)							Replacement Latch Stock No.
(in)	(mm)					B	D	E	G	K	R	T	
-	6	1029820	1.12	1	.25	20.1	66.0	20.6	20.1	16.0	84.5	25.9	1291332
1/4 - 5/16	7 - 8	1029825	2	2	.59	27.9	89.0	27.4	27.9	20.6	117	32.5	1291402
3/8	10	1029830	3.15	3	1.18	36.1	110	36.1	29.5	23.9	157	42.2	1291472
1/2	13	1029835	5.3	5	2.13	46.0	138	38.6	42.4	29.5	186	49.3	1291542
5/8	16	1029840	8	7	3.88	56.0	167	48.5	52.0	38.1	227	59.0	1291612

4:1 Design Factor for Grade 80 Alloy Chain, 5:1 Design Factor for wire rope.

G-334



- Forged steel - Quenched & Tempered.
- Has larger inside dimensions making it easier to attach hooks or other fittings to the chain.
- An exclusive Crosby product.
- After making connections, rivets must be peened.
- Not suitable for use with Grade 80 or Grade 100 chain and chain slings used in overhead lifting.

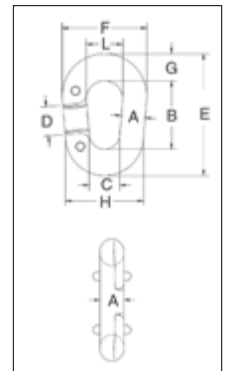

QT

G-334 Pear Shape "Missing Link"® Replacement Links

Chain Size (mm)	Stock No.	Working Load Limit (t)	Weight Per 100 (kg)	Dimensions (mm)									
				A	B	C	D	E	F	G	H	L	
10	1013432	.84	11.3	10.4	51.0	14.2	20.6	74.5	41.4	11.9	35.1	20.6	
13	1013450	1.50	22.7	12.7	63.5	17.5	25.4	92.0	51.0	14.2	42.9	25.4	
16	1013478	2.27	34.0	16.0	70.0	20.6	26.9	102	60.5	16.0	52.5	28.7	
19	1013496	3.22	56.7	19.1	79.5	25.4	28.7	121	70.0	20.6	63.5	31.8	
22	1013511	4.35	90.7	22.4	93.5	31.8	35.1	141	82.5	23.9	76.0	38.1	

4:1 Design Factor.