


SB-427



- Available in six sizes from 13mm - 38mm.
- Button Spelter terminations have a 100% efficiency rating, based on the catalog strength of the wire rope.
- Designed for use with mobile cranes. Can be used to terminate high performance, rotation resistant ropes, and standard 6 strand ropes.
- Easy to install assembly utilizes Crosby WIRELOCK® socketing compound.
- Sockets and buttons are re-usable.
- Replacement buttons and sockets are available.
- Locking feature available to prevent rotation of rope.
- Button contains cap with eye that can be attached to, and used to pull, rope during reeving process.
- Manufactured to the requirements of API-2C.

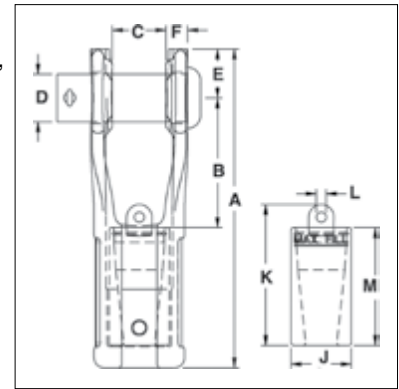

APPLICATION AND WARNING INFORMATION
SECTION 17

SB-427 Button Spelter Sockets & SB-427TB (Bolt, Nut and Cotter Pin)

Wire Rope Dia.		Assembly w/Round Pin Stock No.	Assembly w/Bolt/Nut/Cotter Stock No.	Weight Each (kg)	Replacement Button Kit Stock No.	Replacement Round Pin Kit Stock No.	Replacement Bolt/Nut/cotter Kit Stock No.	WIRELOCK Stock No.	WIRELOCK Kit Size (cc)	WIRELOCK Required (cc)
(in)	(mm)	SB-427	SB-427TB		427B	G-4080	G-4082			
1/2 - 5/8	13-16	1052005	1052406	2.76	1052309	1083188	2036572	1039602	100	35
5/8 - 3/4	16-19	1052014	1052415	4.67	1052212	48276	2038976	1039602	100	60
3/4 - 7/8	19-22	1052023	1052424	7.75	1052221	1083222	2038978	1039602	100	100
7/8 - 1	22-26	1052032	1052433	13.24	1052230	1083240	2037295	1039602	100	140
1-1/8 - 1-1/4	28-32	1052041	1052442	20.86	1052249	1083268	2038983	1039604	250	250
1-3/8 - 1-1/2	35-38	1052050	1052451	35.38	1052258	1083287	2038987	1039606	500	420

Wire Rope Size		Assembly w/Round Pin Stock No.	Assembly w/Bolt/Nut/Cotter Stock No.	Dimensions (mm)									
(in)	(mm)	SB-427	SB-427TB	A	B	C ± 2.29	D	E	F	J	K	L	M
1/2 - 5/8	13-16	1052005	1052406	202	82	33	30	31	14	38	89	6	74
5/8 - 3/4	16-19	1052014	1052415	240	99	39	35	37	17	44	109	10	87
3/4 - 7/8	19-22	1052023	1052424	275	112	45	41	43	19	52	121	10	101
7/8 - 1	22-26	1052032	1052433	327	139	52	51	51	23	62	143	16	115
1-1/8 - 1-1/4	28-32	1052041	1052442	378	144	64	57	64	28	75	180	19	145
1-3/8 - 1-1/2	35-38	1052050	1052451	459	182	77	70	70	31	92	205	19	172