


ROV Release Shackle No 863



- Equipped with bolt and two locking pins
- Dim. according to EN 13889
- High tensile steel, Quenched & Tempered
- All load bearing parts hot-dip galvanized
- 5:1 Design Factor
- Test certificate and traceable 3.1 certificate supplied on request.
- Temperature: -40°C to 200°C

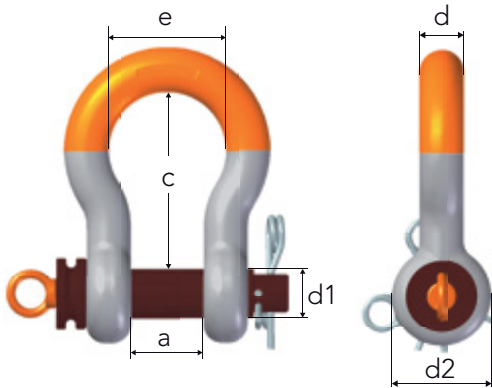


Stock No.	WLL (t)	Dimensions (mm)						Weight (kg)
		d1	d	a	c	d2	e	
A086322	6.5	25	22	37	84	52	58	1.6
A086328	9.5	32	28	46	108	64	74	3.4
A086332	12.0	35	32	52	119	72	83	5.0
A086338	17.0	42	38	60	146	84	98	7.8
A086345	25.0	50	45	74	178	105	127	13.9
A086352	35.0	57	50	83	197	127	138	17.0
A086364	55.0	70	65	105	260	152	180	37.0

8

G-209R



- Capacities from 6.5t through 55t.
- Forged steel, Quenched & Tempered, with alloy pins.
- Working Load Limit permanently shown on every shackle.
- Fatigue rated.
- QUIC-CHECK® deformation and angle indicators forged on the bow.
- All ROV shackle bows are galvanized, then painted fluorescent yellow.
- Look for the Red Pin®... the mark of genuine Crosby quality.



G-209R Subsea Shackles

Working Load Limit (t)	Stock No.	Weight Each (kg)	Dimensions (mm)								
			A +/- 6.4	B	C	H	L	O	P	S	T
6.5	1020872	1.69	36.6	25.4	84	148	102	50	58	17	10
8.5	1020902	2.59	42.9	28.7	95.5	167	119	50	61	18	10
9.5	1020932	3.77	46.0	31.8	108	190	131	70	83	18	12
12	1020952	5.02	51.5	35.1	119	210	146	70	84	23	12
13.5	1020972	6.65	57.0	38.1	133	233	162	75	91	23	15
17	1020992	8.58	60.5	41.4	146	254	175	75	93	24	15
25	1021102	14.1	73.0	51.0	178	313	225	90	114	29	17.5
35	1021125	21.4	82.5	57.0	197	348	253	106	132	30	20
55	1021158	42.8	105.0	70.0	267	453	327	120	145	45	25

5:1 Design Factor. Maximum Proof Load is 2.0 times the Working Load Limit.

Load Rated

Fatigue Rated

QUIC-CHECK®

Q&T

CE

APPLICATION AND WARNING INFORMATION
SECTION 17