


L-562A



- Hook identification code stamped on each hook.
- Quenched & Tempered.
- QUIC-CHECK® angle indicators forged into the top eye; and deformation and angle indicators forged on the hook.
- Fluorescent yellow finish for high subsea visibility.
- Tip extension allows for easy handling.
- Sizes 5.4t through 31.5t utilize a new integrated latch (S-4320) that meets the world-class standard for lifting.
 - Heavy duty stamped latch interlocks with the hook tip.
 - High cycle, long life spring.
- Pad eyes are provided on either side of hook as cable guides. The cable is passed through a hole drilled in the latch that assists in allowing the remotely operated cable to open latch.
- Crosby supplies latches with drilled holes for sizes 5.4t through 31.5t. Other sizes can be fitted by your local Authorized Crosby Dealer. Cables are not provided by Crosby.



APPLICATION AND WARNING INFORMATION
SECTION 17

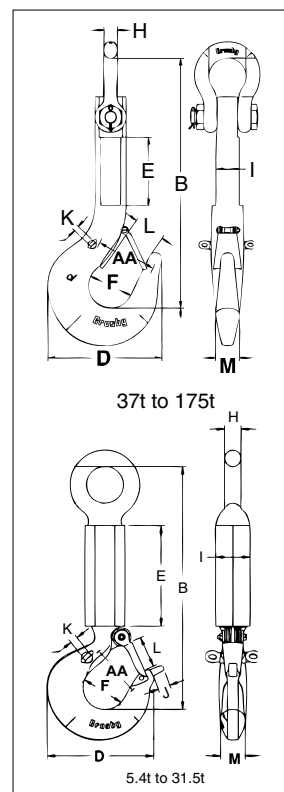

L-562A ROV Eye Shank Hooks

Working Load Limit (t)	Hook ID Code	L-562A Stock No.	Weight Each (kg)	Dimensions (mm)											Replacement Latch Stock No.
				I	E	B	D	J	F	M	H	L	K	AA*	
†5.4	IA	1297722	9.5	65	250	421	123	9.9	51	29	22	35	6.4	63.5	1096515
†11.5	KA	1297792	15	65	250	518	192	30	76	41	32	53	9.7	330	1096611
†16	LA	1297806	18	65	250	550	212	30	83	49	35	58	9.7	330	1096657
†22	NA	1297862	31	85	250	608	263	45	108	60	40	77	19	305	1096704
31.5	OA	1298042	44	85	250	660	346	-	127	76	48	106	19	254	1090161
‡37	PA	1298049	44	80	235	828	357	-	137	76	47	95	19	203	1090189
‡45	SA	1298057	90	80	235	865	392	-	152	83	47	108	19	177	1090189
‡60	TA	1298087	131	90	215	941	470	-	178	99	53	130	19	165	1090205
‡100	WA	1298103	303	140	300	1185	584	-	173	140	69	124	19	127	1090241
‡150	XA	1298117	395	150	230	1233	619	-	171	152	92	137	19	101	1090241
**175	YA	1298130	515	170	255	1326	678	-	191	178	102	-	19	101	143062

4:1 Design Factor. * Deformation Indicators. † Utilizes Crosby S319N style hook. Maximum proof load is 2 times the Working Load Limit. ‡ Utilizes Crosby G-2140 shackle as eye.