


SS-125UNC

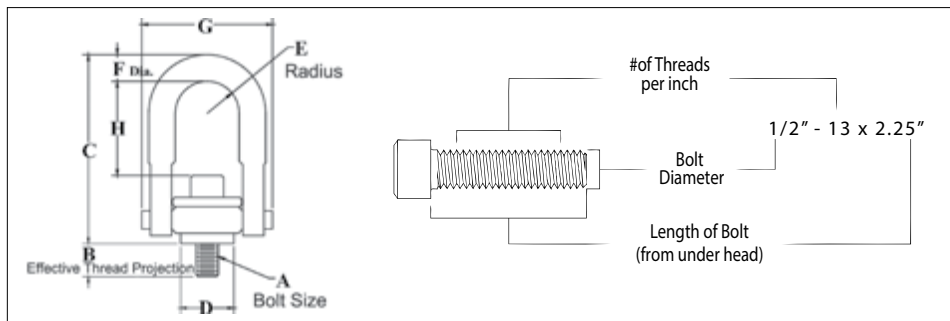

- All components are 316 stainless steel, except bolt retainers, which are made from 15-7 PH (UNS 15700) magnetic stainless steel.
- Rated at 100 percent at 90 degree angle.
- Each product has a Product Identification Code (PIC) for material traceability, along with the Working Load Limit and the name Crosby or "CG" stamped into it.
- Individually proof tested to 2 times the Working Load Limit with certification.
- Fatigue Rated to 20,000 cycles at 1-1/2 times the Working Load Limit.
- Washer is color-coded for easy identification (Red - UNC thread).
- Bolt specification is 316 stainless steel socket head cap screw to ASTM F837 Group 1 (316).
- BOLT SIZE IDENTIFICATION: The size of the bolt will be stated as in the drawing above. Illustration shows meaning of each dimension given.

SS-125UNC Threads

Frame Size No.	Stock No.	Working Load Limit (kg)	Torque (Nm)	Bolt Size A (mm)	Dimensions (mm)							Weight Each (kg)
					Effective Thread Projection Length B	C	D	Radius E	Diameter F	G	H	
1	1065000	181	4.7	5/16 - 18 x 1.0	7.4	67.8	21.6	10.9	8.6	46.7	32.3	0.14
1	1065004	181	4.7	5/16 - 18 x 1.25	13.7	67.8	21.6	10.9	8.6	46.7	32.3	0.14
1	1065008	227	8	3/8 - 16 x 1.25	13.7	67.8	21.6	10.9	8.6	46.7	32.3	0.14
2	1065016	567	19	1/2 - 13 x 2.0	19.8	121	36.8	22.4	17.5	89.4	58.7	1.18
2	1065020	567	19	1/2 - 13 x 2.25	26.2	121	36.8	22.4	17.5	89.4	58.7	1.18
2	1065024	567	19	1/2 - 13 x 2.5	32.5	121	36.8	22.4	17.5	89.4	58.7	1.18
2	1065028	907	41	5/8 - 11 x 2.0	19.8	121	36.8	22.4	17.5	89.4	55.4	1.18
2	1065032	907	41	5/8 - 11 x 2.25	26.2	121	36.8	22.4	17.5	89.4	55.4	1.18
2	1065036	907	41	5/8 - 11 x 2.5	32.5	121	36.8	22.4	17.5	89.4	55.4	1.18
2	1065040	1134	68	3/4 - 10 x 2.25	26.2	121	36.8	22.4	17.5	89.4	52.3	1.36
2	1065044	1134	68	3/4 - 10 x 2.75	38.9	121	36.8	22.4	17.5	89.4	52.3	1.36
3	1065048	1588	68	3/4 - 10 x 2.75	26.4	166	55.9	35.6	23.9	131	77.7	3.18
3	1065052	1588	68	3/4 - 10 x 3.25	39.1	166	55.9	35.6	23.9	131	77.7	3.18
3	1065056	1814	108	7/8 - 9 x 2.75	26.4	166	55.9	35.6	23.9	131	74.4	3.18
3	1065060	1814	108	7/8 - 9 x 3.0	32.8	166	55.9	35.6	23.9	131	74.4	3.18
3	1065064	2268	115	1 - 8 x 3.0	1.29	6.52	2.20	1.40	.94	5.14	2.81	7.5
3	1065068	2268	156	1 - 8 x 3.25	39.1	166	55.9	35.6	23.9	131	71.4	3.40
3	1065072	2268	156	1 - 8 x 4.0	58.2	166	55.9	35.6	23.9	131	71.4	3.4
4	1065080	3402	156	1-1/4 - 7 x 4.0	48.0	222	81	44.5	31.8	165	105	6.35
5	1065084	5443	319	1-1/2 - 6 x 5.5	68.6	317	124	57.2	44.5	217	163	15.4
5	1065088	6804	542	2 - 4.5 x 5.75	75.2	317	124	57.2	44.5	217	150	16.3
6	1065092	11340	746	2-1/2 - 4 x 8.0	102	428	166	76.2	57.2	296	204	39.9
6	1065096	11340	1424	2-1/2 - 8 x 8.0	102	428	166	76.2	57.2	296	204	39.9
7	1065100	17010	1424	3 - 4 x 10.25	127	495	206	95.3	69.9	359	215	75.3
8	1065104	22680	2915	3-1/2 - 4 x 13	178	561	218	102	82.6	404	236	120

5:1 Design Factor.

Load Rated

Fatigue Rated

APPLICATION AND WARNING INFORMATION
SECTION 17