

IPBC



For Horizontal Transfer - with Pretension System.

- Available in capacities of 1 through 4.5 metric tons (Higher Working Load Limits are available upon request).
- Jaw openings available: 0 to 40mm.
- Welded alloy steel body for strength and smaller size. Forged alloy, components where required.
- Equipped with handle for easy placement.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Crosby IP logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body. User manual with test certificate is included with each clamp.
- Maintenance and repair kits are available.
- Manufactured by an ISO 9001 facility.
- Temperature range -40 °C (-40 °F) to +100 °C (+212 °F)

IPHGZ






Model IPBC



Model	Working Load Limit (t)*	Stock No.	Weight Each (kg)	Dimensions (mm)										Maintenance Kit Stock No.
				Jaw A	B	C	E	F	G	H	J	K	L	
IPBC	1	2700410	3.5	0 - 20	132	52	26	75	185	36	16	182	12	2715189
IPBC	2	2700411	6.5	0 - 25	152	62	30	82	210	49	20	218	15	2715198
IPBC	3	2700412	8.5	0 - 25	157	66	30	82	210	57	20	225	15	2715198

*Design Factor based on EN 13155 and ASME B30.20.

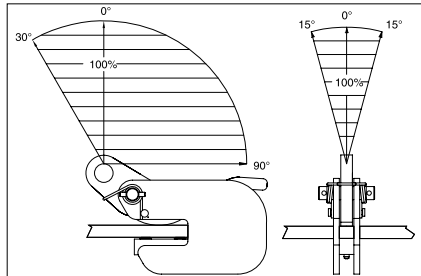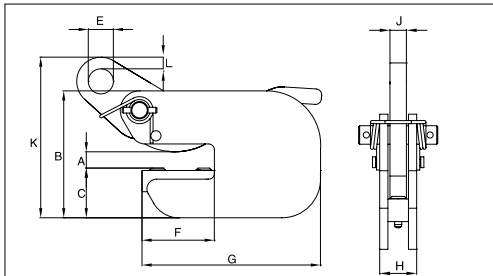

12

IPHGZ: Universal Lifting Eye / IPHGZ: Fixed Hoisting Eye



Model	Working Load Limit (t)*	Stock No.	Weight Each (kg)	Dimensions (mm)										Maintenance Kit Stock No.
				Jaw A	B	C	D	E	F	G	J	K		
IPHGZ	1.5	2705455	9.0	0 - 25	110	232	287	70	139	90	20	16		2715450
IPHGZ	3	2705456	19.9	0 - 40	119	253	348	75	175	120	25	20		2715452
IPHGZ	4.5	2705457	30.0	0 - 40	119	301	370	80	175	155	30	44		2715454
Fixed Hoisting Eye														
IPHGZ	0.75	2705451	4.0	0 - 25	82	148	206	50	99	98	12	22	-	
IPHGZ	1.5	2705452	7.3	0 - 25	110	200	250	50	118	90	20	28	-	
IPHGZ	3	2705453	12.3	0 - 40	120	227	305	70	148	120	25	32	-	
IPHGZ	4.5	2705454	25.0	0 - 40	120	284	381	70	181	155	30	40	-	

* Design Factor based on EN 13155 and ASME B30.20.

