




IPPH



For lifting pipe, tube, or any similarly shaped fabrications.

- Crosby IP Pipe Hooks provide a fast and efficient method for lifting pipe, tube or any similarly shaped fabrications.
- Alloy steel plate construction.
- Equipped with a convenient handle.
- Equipped with a Bolt Type Shackle.
- Optional non marring inserts available.

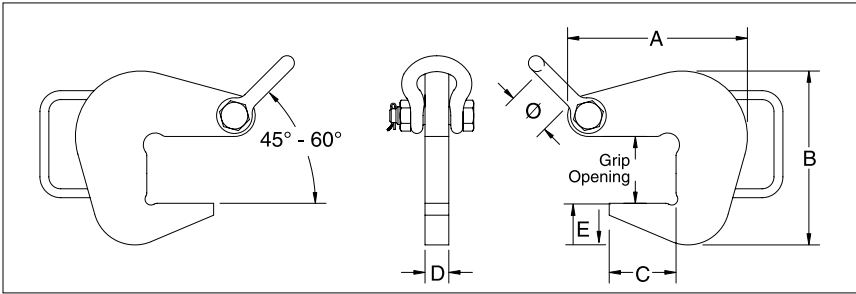

Model IPPH



Model	Working Load Limit Per Pair (t)*	Stock No.	Weight Each (kg)	Grip Opening (mm)**	Dimensions (mm)						Shackle Size (mm)	Optional Nylon (PA6) Inserts
					A	B	C	D	E	Ø		
IPPH	2	2734500	2.7	52.3	148	129	52.3	25.4	31.8	42.9	5/8	2734900 2734909
IPPH	4	2734509	4.5	71.4	192	186	71.4	25.4	44.4	42.9	5/8	2734918
IPPH	6	2734518	7.7	103	259	256	103	25.4	57.2	50.8	3/4	2734927
IPPH	10	2734527	17.3	154	376	383	154	25.4	88.9	68.5	1	2734936
IPPH	6	2734536	21.8	154	376	392	154	30.0	98.0	74.0	1 1/8	2734945
IPPH	10	2734545	23.1	154	376	407	154	30.0	113	74.0	1 1/8	2734945

*Design factor based on EN13155 and ASME B30.20.

**NOTE: To determine grip opening when equipped with an insert, see the dimensions in the Pipe Hook Inserts table below.

IPPHI



- Replaceable nylon (PA6) inserts for use with the IPPHI Pipe Hook that minimizes thread and pipe damage.

Pipe Hook Inserts

Model	Stock No.	ID of Pipe (mm)	Grip Opening (mm)
IPPHI	2734900	76 - 305	41
	2734909	305 - 457	44
	2734918	457 - 762	63
	2734927	762 - 1067	95
	2734936	1067 - 1329	145
	2734945	1067 - 1329	145

