


IPSBUUZ



For Lifting, Transferring and Placing Complete Shipsections.

- Available in capacities of 4.5 through 9 metric tons (higher Working Load Limits are available upon request).
- Wide variety of jaw openings available: HP 100mm to HP 430mm.
- Welded alloy steel body for strength and smaller size. Forged alloy components, where required.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Crosby IP logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body. User manual with test certificate is included with each clamp.
- Minimum WLL of 10% of maximum WLL.
- Maintenance and repair kits are available.
- Temperature range -40 °C (-40 °F) to +100 °C (+212 °F)

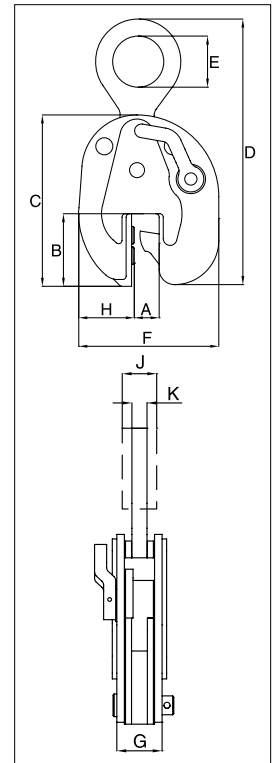

Model IPSBUUZ / IPSBUSUZ: With Universal Hoisting Eye



| Model | Working Load Limit (t)* | Stock No. | Weight Each (kg) | Dimensions (mm) | | | | | | | | | | Maintenance Kit Stock No. |
|----------|-------------------------|-----------|------------------|-----------------|-----|-----|-----|----|-----|-----|-----|----|----|---------------------------|
| | | | | Profile A† | B | C | D | E | F | G | H | J | K | |
| IPSBUUZ | 4.5 | 2705771 | 15.5 | HP 100-160 | 107 | 252 | 450 | 75 | 206 | 96 | 82 | 36 | 20 | 2715484 |
| IPSBUUZ | 9 | 2705773 | 43.0 | HP 100-160 | 105 | 274 | 491 | 80 | 248 | 123 | 104 | 44 | 20 | 2715485 |
| IPSBUSUZ | 4.5 | 2705772 | 38.0 | HP 180-430 | 227 | 428 | 635 | 75 | 377 | 95 | 128 | - | 20 | 2715486 |
| IPSBUSUZ | 9 | 2705774 | 69.0 | HP 180-430 | 227 | 478 | 718 | 80 | 425 | 118 | 155 | 44 | 25 | 2715487 |

*Design Factor based on EN 13155 and ASME B30.20. † Profile A is the type of Holland Bulb (HP) style and size material.

IPSBUUZ

