




**Split
Overhaul
Ball**

- Attaches easily to Wireline.

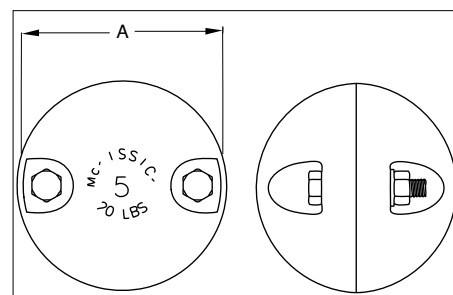


Split Overhaul Ball

Catalog No.	Stock No.	Wire Rope Diameter (mm)	Weight Each (kg)	Ball Diameter A (mm)
SHB - 15	2003822	6-8	6.80	129
SHB - 20	2003830	10	9.07	137
SHB - 50	2003831	13 - 16	22.7	181
SHB - 100	2003832	16 - 19 - 22	45.4	233



AS-15

- Utilizes genuine Crosby hooks which are forged alloy steel, Quenched & Tempered, and contain the patented QUIC-CHECK® marking.
- Entire overhaul ball is zinc plated to resist corrosion.
- Designed with angular contact bearings which maximizes efficiency, reliability, and service life of swivel and extend the life of the wireline.
- Available with wide jaw opening that utilizes nylon spools and shields.
- Designed for applications where headroom is critical.
- Other upper fittings available upon request.

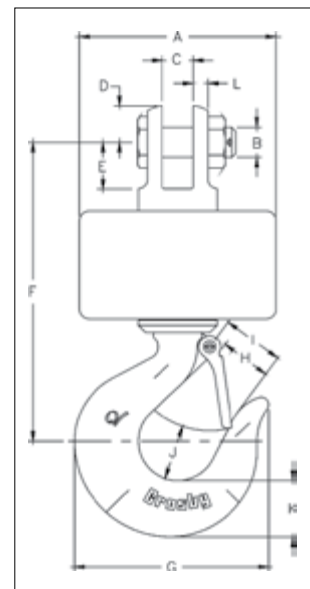

Angular Contact Bearing Swivel Overhaul Balls

Stock No.	Working Load Limit (t)	Wire Rope Diameter (mm)	Dimensions (mm)												Weight Each (kg)
			A	B	C	D	E	F	G	H	I	J	K	L	
2009806	1.36	10	102	12.7	12.7	17.5	19.8	160	104	28.4	31.0	30.2	28.4	7.85	4.08
2009807	2.72	13	127	19.1	19.1	23.9	30.2	217	126	34.0	38.1	35.1	36.6	9.65	8.62
2003969	4.54	16	175	22.4	26.9	28.4	39.6	275	165	42.9	47.8	44.5	46.0	14.2	19.5
2009808	7.71	19	178	30.2	39.6	34.0	53.0	349	221	57.0	63.5	65.0	66.0	13.5	27.2

5:1 Design Factor.