


BlokCam X3L Camera System

for tower cranes | Part # 7380008

Design Overview

- Easy and quick to install; can be fitted within an hour.
- Uses high powered neodymium magnets.
- The lens is auto-focus and always gives clear views of the load and surrounding area below the hook.
- HD 1080p resolution.
- Audio from sensor to cab.
- Optional single and split screen mode with additional cameras.
- Long range transmission.
- Record on loop for up to 30 days.
- Purpose built aluminum housing.
- Multiple built in lanyard anchors.
- Safety lanyard provides secondary security tethering.
- Hands-free operation.
- Multi positional sensor for variable views.
- LED indicators.
- Two batteries per system.
- 12 hour battery life.
- Multi-voltage AC and DC inputs.
- Durable all-weather design, manufactured to IP67 rating.
- -4°F to 131°F operating temperature.
- Optional mobile app and 4G live streaming.
- CE and FCC approved.
- High-quality industrial connectors.
- Color-coded connectors.

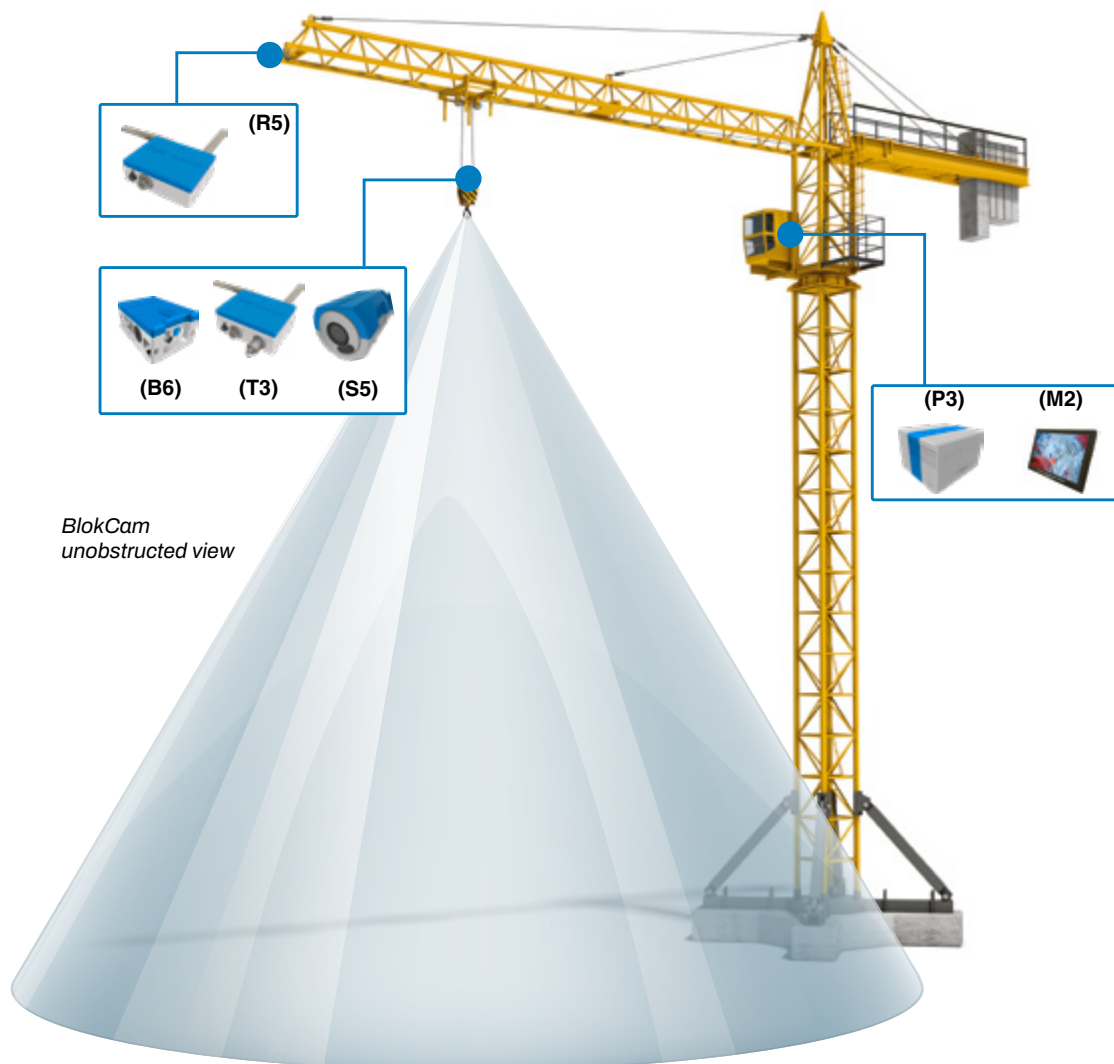

Hook-mounted safety system and accessories available at kitocrosby.com/blokcam.

Modular design, compatible across a wide variety of cranes¹



What's included with the BlokCam X3L system

Sensor (S5)

Part # 7370022

The S5 is a 113° wide angle lens. The low profile design, tool-free operation, and rotatable lens allow for easy installation on any side of the hook block, including between the cheek plates.

Transmitter (T3)

Part # 7370023

T3 dramatically improves the most important aspects of the BlokCam. The combination of performance, specification, aesthetics, and 71mm low profile design make this a must for all crane operations. Connect up to two sensors.

Battery (B6)

Part # 7370032

B6 is a non hazardous lithium 14.54v battery pack. The clever tool-free design and easy grip finger slots makes it easy to install, remove, and charge. IP67.

Charger (B6-CH3)

Part # 7360033

Our li-ion charger is designed to improve the efficiency of your BlokCam batteries and the performance of the camera system.

Repeater (R5)

Part # 7370020

The Repeater is mounted on the jib, boom tip, or cab, depending on the crane type and required installation. It has been specifically designed for fast, wireless, telescopic deployment.

Monitor (M2)

Part # 7360019

Our HD Monitor is a 10.1-inch 16:9 LCD display with built in speakers and HDMI input. It has a 1280 x 800 pixel panel with automatic brightness control.

Processor (P3)

Part # 7370029

Our purpose-built Processor can project multiple high definition images and audios through a single HDMI lead with less than 0.2 seconds of latency. The design of the Processor accommodates multivoltage AC and DC inputs, making the BlokCam system compatible across all types of cranes. The Processor also provides power to the monitor, eliminating the need for a secondary socket or power supply.