


## Dee Shackle No 834 and No 835

- Standard: DNV 2.7-1 Type Approved, EN 13889 and US Federal Spec. RR-C-271
- Material: High tensile carbon steel, Quenched & Tempered, Grade 6
- Finish: All parts hot-dip galvanized, pin brown painted on top of galvanized.
- Design Factor: 6:1
- Documentation: Test certificate and traceable raw material / inspection certificate acc. EN 10204 - 3.1.DNVGL-ST-E271-2.7-1 and E273-2.7-3 Type Approval Certification.
- Temperature: - 4°F to 392°F

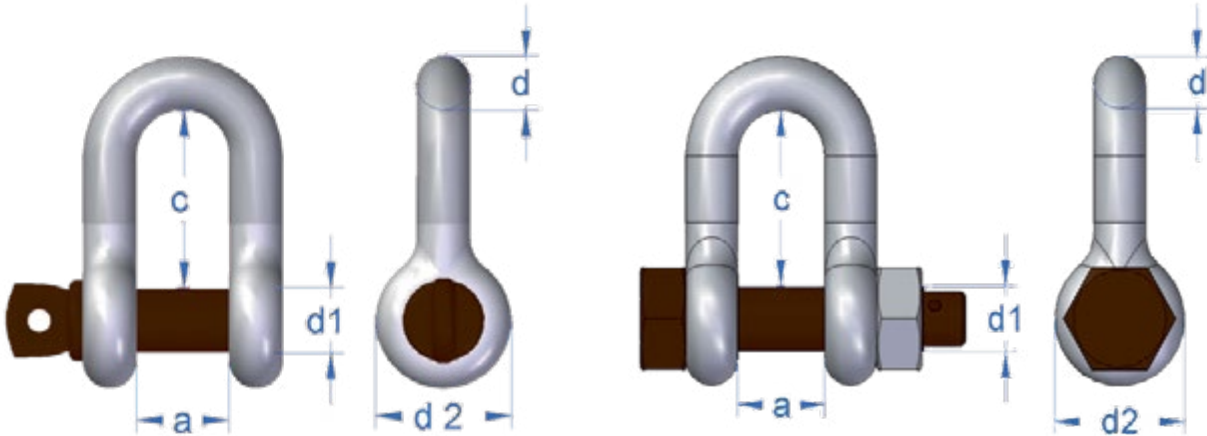

Shackle No 834 with screw pin

Shackle No 835 with safety bolt



834 Screw Pin Stock No.	835 Safety Bolt Stock No.	WLL (t) 6:1	Pin d1 (in)	Nominal Size d		Inner Width a* (in)	Inner Length c* (in)	Eye Outer d2 (in)	834 Screw Pin Weight (lb)	835 Safety Bolt Weight (lb)
				(mm)	(in)					
A083416	A083516	3.25	0.75	16	5/8"	1.06	2.01	1.57	1.21	1.32
A083419	A083519	4.75	0.87	19	3/4"	1.22	2.36	1.89	2.20	2.43
A083422	A083522	6.5	0.98	22	7/8"	1.46	2.80	2.05	2.87	3.31
A083425	A083525	8.5	1.10	25	1"	1.69	3.19	2.36	4.19	4.85
A083428	A083528	9.5	1.26	28	1 1/8"	1.81	3.54	2.52	6.17	6.83
A083432	A083532	12.0	1.38	32	1 1/4"	2.05	3.94	2.83	7.937	9.26
A083435	A083535	13.5	1.50	35	1 3/8"	2.24	4.37	2.99	10.1	12.4
A083438	A083538	17.0	1.65	38	1 1/2"	2.36	4.80	3.31	14.3	16.5
A083445	A083545	25.0	1.97	45	1 3/4"	2.91	5.87	4.13	25.3	28.7

\* Forging tolerance: +/- 5% on inside width/length.

Split pin included



Applies to shackle  
No 835 only.