


G-209A Grade 8



- Forged alloy steel, Quenched & Tempered, with alloy pins.
- Meets performance requirements of Grade 8 shackles.
- Working Load Limit permanently shown on every shackle.
- Hot-dip galvanized.
- Size 3/8 inch is mechanically galvanized.
- Shackles can be furnished proof tested with certificates to designated standards, such as ABS, DNV, Lloyds, or other certification. Charges for proof testing and certification available when requested at the time of order.
- Approved for use at -40° C (-40° F) to 204° C (400° F).
- G-209A Screw pin anchor shackles meet the performance requirements of Federal Specification RR-C-271H, Type IVA, Grade B, Class 2, except for those provisions required of the contractor.

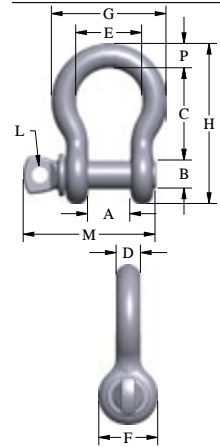

G-209A Alloy Screw Anchor Pin Shackles



APPLICATION AND WARNING INFORMATION
SECTION 17


Nominal Size (in)	Working Load Limit (t)	Stock No.	Weight Each (lb)	Dimensions (in)													Replacement Screw Pin Stock No.
				A	Tol. A ±	B	C	Tol. C ±	D	E	F	G	H	L	M	P	
3/8	2	1017450	.31	.66	.06	.44	1.45	.13	.38	1.03	.92	1.79	2.50	.25	2.06	.38	-
7/16	2.67	1017472	.38	.75	.06	.50	1.69	.13	.44	1.16	1.06	2.04	2.91	.31	2.37	.44	-
1/2	3.33	1017494	.63	.81	.06	.63	1.88	.13	.50	1.31	1.18	2.31	3.28	.38	2.69	.50	-
5/8	5	1017516	1.38	1.06	.06	.75	2.38	.13	.62	1.69	1.50	2.93	4.19	.44	3.34	.69	-
3/4	7	1017538	2.35	1.25	.06	.88	2.81	.25	.75	2.00	1.81	3.50	4.97	.50	3.97	.81	-
7/8	9.5	1017560	3.61	1.44	.06	1.00	3.31	.25	.88	2.28	2.10	4.04	5.83	.50	4.50	.97	-
1	12.5	1017582	5.32	1.69	.06	1.16	3.76	.25	1.00	2.69	2.38	4.69	6.56	.56	5.13	1.06	-
1-1/8	15	1017604	7.30	1.81	.06	1.25	4.27	.25	1.16	2.91	2.68	5.15	7.47	.63	5.97	1.25	1083867
1-1/4	18	1017626	9.88	2.03	.06	1.41	4.69	.25	1.29	3.26	3.00	5.76	8.26	.69	6.50	1.38	1083873
1-3/8	21	1017648	13.25	2.25	.13	1.56	5.22	.25	1.42	3.62	3.31	6.38	9.16	.75	6.93	1.50	1083885

4.5:1 Design Factor. Maximum Proof Load is 2 times the Working Load Limit (metric tons) and 2.2 times the Working Load Limit (short tons). For Working Load Limit reduction due to side loading applications, see Warnings & Applications.

G-2169



- Quenched & Tempered for maximum strength.
- Forged alloy steel.
- Available in galvanized finish.
- Can be individually proof tested and magnetic particle inspected upon request. Crosby certification available at time of order.
- Meets or exceeds all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, these shackles meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.
- Look for the Red Pin®... the mark of genuine Crosby quality.

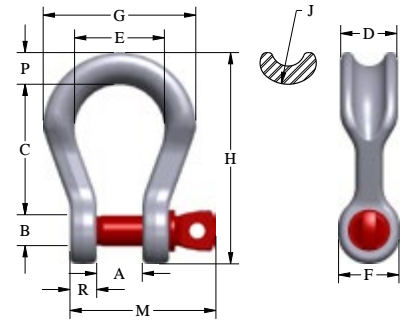

G-2169 Alloy Screw Pin Wide Body Shackles



APPLICATION AND WARNING INFORMATION
SECTION 17

Working Load Limit (t)	Stock No.	Weight Each (lb)	Dimensions (in)													Replacement Screw Pin Stock No.	
			A	B +/- .25	C	D +/- .02	E	F	G	H	J	K	L	M	P		R
7	1021655	3.5	1.25	.88	3.56	1.60	2.50	1.82	4.10	5.87	1.25	1.25	.50	3.97	.96	.69	-
12 1/2	1021673	8.8	1.69	1.16	4.63	2.13	3.26	2.38	5.51	7.63	1.37	1.63	.56	5.13	1.25	.92	-
18	1021691	13	2.03	1.41	5.81	2.50	4.00	2.69	6.76	9.38	1.50	2.00	.69	6.25	1.41	1.16	1083873

5:1 Design Factor. Proof Load is 2 times the Working Load Limit.