


G-2140

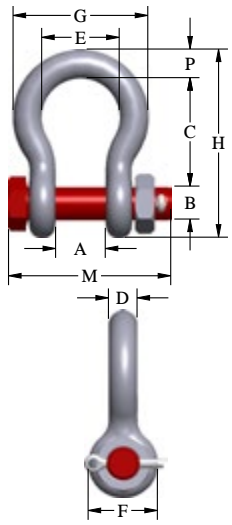

- Quenched & Tempered.
- Alloy bows, alloy bolts.
- Forged alloy steel 2 through 300 metric tons. Cast alloy steel 400 metric tons.
- Meets performance requirements of Grade 8 shackles.
- Working Load Limit is permanently shown on every shackle.
- 30, 40, 55, and 85 metric ton shackle bows are available galvanized (G) or self colored (S) with bolts that are galvanized and painted red.
- Size 3/8 inch is mechanically galvanized.
- 120, 150, 175 metric ton shackle bows are hot-dip galvanized; bolts are Dimetcoated and painted red.
- 200, 250, 300, 400 metric ton shackle bows are Dimetcoated; bolts are Dimetcoated and painted red.
- Approved for use at -40° C (-40° F) to 204° C (400° F).
- Shackles are Quenched & Tempered and can meet DNV impact requirements of 42 Joules (31 ft-lb) at -20° C (-4° F).
- Shackles 200 metric tons and larger are provided as follows:
 - Serialized bolt and bow
 - Material certification (chemical)
 - Magnetic particle inspected.
 - Certification must be requested at time of order.
- 30t and larger meet or exceed all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. 2140 shackles meet other critical performance requirements including impact properties and material traceability, not addressed by ASME B30.26.
- Type Approval certification in accordance with ABS 2016 Steel Vessel Rules and 2016 ABS Guide for Certification of Lifting Appliances. Certificates are available when requested at time of order and may include additional charges.
- G-2140 meets the performance requirements of Federal Specification RR-C-271H, Type IVA, Grade B, Class 3, except for those provisions required of the contractor. For additional information, see Warnings & Applications.
- Look for the Red Pin®... the mark of genuine Crosby quality.

G-2140 Alloy Bolt Type Anchor Shackles

Nominal Shackle Size (in)	Working Load Limit (t)	Stock No.	Weight Each (kg)	Dimensions (mm)														Replacement Bolt Stock No. *
				A	ToL. A ±	B	C	ToL. C ±	D	E	F	G	H	L	M	N	P	
3/8	2	1021015	.15	17	1.5	11	37	3.3	10	26	23	45	64	-	55	-	10	-
7/16	2 2/3	1021020	.22	19	1.5	13	43	3.3	11	30	27	52	74	-	64	-	11	-
1/2	3 1/2	1021029	.36	21	1.5	16	48	3.3	13	33	30	59	83	-	71	-	13	-
5/8	5	1021038	.76	27	1.5	20	61	3.3	16	43	38	74	106	-	90	-	18	-
3/4	7	1021047	1.23	32	1.5	23	71	6.4	19	51	46	89	126	-	105	-	21	-
7/8	9 1/2	1021056	1.79	37	1.5	26	84	6.4	22	58	53	103	148	-	122	-	25	-
1	12 1/2	1021065	2.57	43	1.5	29	96	6.4	25	68	61	119	167	-	137	-	27	-
1-1/8	15	1021074	3.75	46	1.5	32	108	6.4	30	74	68	131	190	-	150	-	32	1084382
1-1/4	18	1021083	5.31	52	1.5	36	119	6.4	33	83	76	146	210	-	170	-	35	1084391
1-3/8	21	1021092	7.17	57	3.3	39	133	6.4	36	92	84	162	233	-	183	-	38	1084400
1-1/2	30	1021110	8.53	61	3.3	42	146	6.4	39	99	92	176	254	-	196	-	41	1084409
1-3/4	40	1021138	15.3	73	3.3	52	178	6.4	47	127	106	224	313	-	245	-	57	1084418
2	55	1021156	22.6	83	3.3	59	197	6.4	53	146	122	258	348	-	274	-	61	1084427
2-1/2	85	1021174	46.7	105	6.4	71	267	6.4	69	184	148	324	455	-	344	-	80	1084436
3	120	1021192	73.5	127	6.4	84	330	6.4	79	200	165	371	546	-	384	-	92	1084445
3-1/2	† 150	1021218	122	133	6.4	96	372	6.4	92	229	203	432	632	102	432	46	111	1084454
4	† 175	1021236	144	140	6.4	108	368	6.4	102	254	229	457	652	102	457	46	116	1084463
4-3/4	† 200	1021234	209	184	6.4	121	386	6.4	121	279	267	516	712	102	611	46	127	1087552
5	† 250	1021243	276	216	4.0	127	470	1.8	127	330	305	600	829	102	632	46	143	1087561
6	† 300	1021252	362	213	4.0	153	475	1.8	149	330	330	629	871	102	666	46	154	1087570
7*	† 400	1021478	585	210	6.4	178	572	6.4	152	330	356	660	1022	102	753	46	184	1020068

4.5:1 Design Factor for sizes 2 through 21 metric tons, 5.4:1 Design Factor for sizes 30 through 175 metric tons, 4:1 Design Factor for 200 through 400 metric tons. Maximum Proof Load is 2 times the Working Load Limit. *Cast alloy steel. †Furnished with round head bolts with a handle. For Working Load Limit reduction due to side loading applications, see Warnings & Applications.

