

Super Shackle No 858 Bow shackle with safety bolt


Unique Benefits with The Super Shackle

In certain situations a demand for extra Working Load Limit occurs in others the lifting environment has limited space for the lifting application. The 858 Super Shackle enables a higher working load limit for the same nominal size.

The Super shackle meets the US Federal Specification RR.C-271. It is a grade 8 shackle and has all parts hot dipped galvanized, including the safety bolt.



- Standard: US Federal Spec. RR.C-271 Type IVA Class 3, Grade B
- Material: High tensile steel. Quenched & Tempered, Grade 8
- Finish: All parts hot-dip galvanized + brown color marking
- Design Factor: 5:1
- Documentation: Test certificate and traceable 3.1 certificate
- Temperature: - 40°F to 392°F
- Clearly marked with brand, grade, WLL, size, CE marking, and traceability code for full traceability.

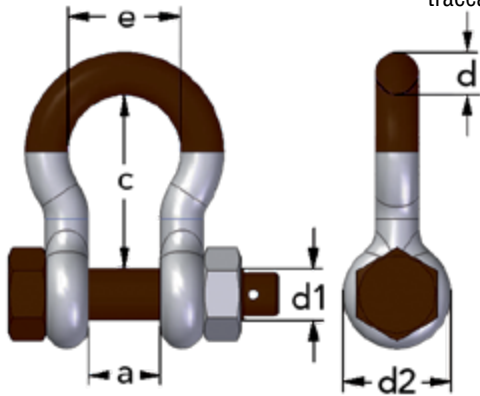

Stock No.	WLL (t) 5:1	Pin d1 (in)	Nominal Size d		Inner Width a (in)	Inner Length c (in)	Bow Width e (in)	Eye Outer d2 (in)	Weight (lb)
			(mm)	(in)					
A085813	3.3	0.62	13	1/2"	0.82	2.00	1.29	1.29	0.88
A085816	5.0	0.74	16	5/8"	1.06	2.36	1.65	1.57	1.54
A085819	7.0	0.86	19	3/4"	1.22	2.79	1.92	1.88	2.64
A085822	9.5	0.98	22	7/8"	1.45	3.30	2.36	2.04	3.74
A085825	12.5	1.10	25	1"	1.69	3.74	2.67	2.36	5.51
A085828	15.0	1.25	28	1 1/8"	1.81	4.25	2.91	2.51	7.49
A085832	18.0	1.37	32	1 1/4"	2.04	4.68	3.26	2.83	10.5
A085835	21.0	1.49	35	1 3/8"	2.24	5.19	3.50	2.99	15.4
A085838	30.0	1.65	38	1 1/2"	2.36	5.74	3.85	3.30	19.4
A085845	40.0	1.96	45	1 3/4"	2.91	7.00	5.00	4.13	33.0

Split pin included