


G-2130CT / G-2140CT



- Forged, Quenched & Tempered, with alloy bolt.
 - G-2130CT - carbon steel
 - G-2140CT - alloy steel
- Working Load Limit permanently shown on every shackle.
- Individually serialized with certification.
- Fatigue Rated (G-2130CT only).
- All sizes are individually proof tested to 2.0 times the Working Load Limit.
- Finish is inorganic zinc primer.
- Bow and bolt are certified to meet Charpy impact testing of 42 Joules (31 ft-lb) min. avg. at -20° C (-4° F).
- Individually magnetic particle inspected with certification.
- Type Approval and certification in accordance with DNV 2.7-1 Offshore Containers, and Rules for Certification of Lifting Appliances, DNV-OS-E101 and are produced in accordance with DNV MSA requirements, including required documents.
- DNV certified minimum design temperature -4° F. May be used at -50° F (-45° C) in non DNV applications.
- Meets the performance requirements of Federal Specification RR-C-271H Type IVA:
 - G-2130CT - Grade A, Class 3, except for those provisions required of the contractor.
 - G-2140CT - Grade B, Class 3, except for those provisions required of the contractor.

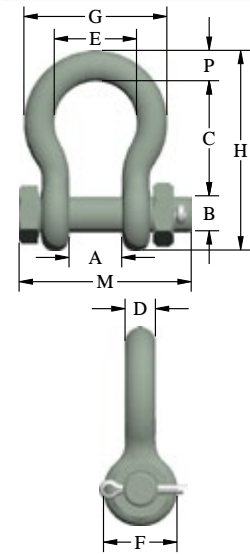

G-2130CT COLD TUFF® Bolt Type Anchor Shackles

Nominal Shackle Size (in)	Working Load Limit (t)	Stock No.	Weight Each (kg)	Dimensions (mm)											
				A	Tol. A ±	B	C	Tol. C ±	D	E	F	H	G	M	P
3/4	4 3/4	1260568	1.23	32	1.5	23	71	6.4	19	51	46	126	89	105	21
7/8	6 1/2	1260577	1.76	37	1.5	26	84	6.4	22	58	53	148	103	122	25
1	8 1/2	1260586	2.57	43	1.5	29	96	6.4	25	68	61	167	119	137	27
1-1/8	9 1/2	1260595	3.75	46	1.5	32	108	6.4	30	74	68	190	131	150	32
1-1/4	12	1260604	5.31	52	1.5	36	119	6.4	33	83	76	210	146	170	35
1-3/8	13 1/2	1260613	6.85	57	3.3	39	133	6.4	36	92	84	233	162	183	38
1-1/2	17	1260622	9.43	61	3.3	42	146	6.4	39	99	92	254	176	196	41
1-3/4	25	1260633	15.4	73	3.3	52	178	6.4	47	127	106	313	224	245	57

5.4:1 Design Factor. Maximum Proof Load is 2 times the Working Load Limit. For Working Load Limit reduction due to side loading applications, see Warnings & Applications.

G-2140CT COLD TUFF® Alloy Bolt Type Anchor Shackles

Nominal Shackle Size (in)	Working Load Limit (t)	Stock No.	Weight Each (kg)	Dimensions (mm)											
				A	A ±	B	C	C ±	D	E	F	H	G	M	P
1-1/2	30	1260801	9.43	61	3.3	42	146	6.4	39	99	92	254	176	196	41
1-3/4	40	1260812	15.4	73	3.3	52	178	6.4	47	127	106	313	224	245	57
2	55	1260823	23.6	83	3.3	59	197	6.4	53	146	122	348	258	274	61
2-1/2	85	1260834	43.5	105	6.4	71	267	6.4	69	184	148	455	324	344	80
3	120	1260843	80.7	127	6.4	84	330	6.4	79	200	165	546	371	384	92
3-1/2	† 150	1260852	120	133	6.4	96	372	6.4	92	229	203	632	432	432	111

5.4:1 Design Factor on 30t through 175 metric tons. 4:1 Design Factor on 200 metric tons and larger. Maximum Proof Load is 2 times the Working Load Limit for all sizes.

